

Acumis Recessed M - #2114



36W





3285lm



3000K




Diffused



Photometric Data

| | | | |
|------------------------|-----------------|----------------------------|-------------------|
| Light source | LED - Mid Power | Light output ratio | 69% |
| Power (W) | 36W | Color rendering index (Ra) | > 92 |
| Delivered lumens | 3285lm | Color rendering index (R9) | > 50 |
| Source lumens | 4716lm | Binning MacAdam | < 3 SDCM |
| Colour temperature (K) | 3000K | LED life | L90 B10 Tj75°C |
| Luminaire efficacy | 91.25lm/W | UGR | < 19 |
| Beam angle | Diffused | Operating temperature | -20°C to +50°C |
| Cutoff angle | NA | Light distribution | Direct - Diffused |




Technical Data


| | | | |
|-------------------|---------------------|------------------|--------------------|
| Mounting detail | Recessed | Product weight | 1570gms Per 1200MM |
| Fixing detail | Dual tension spring | Safety class | III |
| Orientation | Fixed | Insulation class | III |
| IP rating | IP20 | Voltage | AC230V |
| Glow wire test | 850° | Forward voltage | DC24V |
| Trim material | Aluminum | Driver | CV - Remote |
| Heatsink material | Aluminum Extrusion | | |

1. Shows an isometric view of the render of an Acumis Recessed Fixture.
2. Shows an isometric view of the Acumis Recessed Fixture.
3. Shows a Close-up of the 'I' joint.
4. Shows a Close-up of the 'L' joint.
5. Shows the Bottom view of the Acumis Recessed Fixture in rectangular configuration.
6. Shows the Bottom view of the Acumis Recessed Fixture in 'L' configuration.

- A. Shows a hairline cut on the diffuser when the fixture is made in the 'L' configuration.
- B. Shows a hairline cut on the trim.

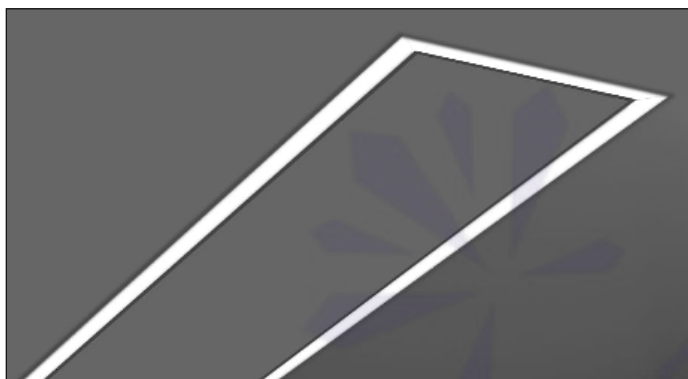

①

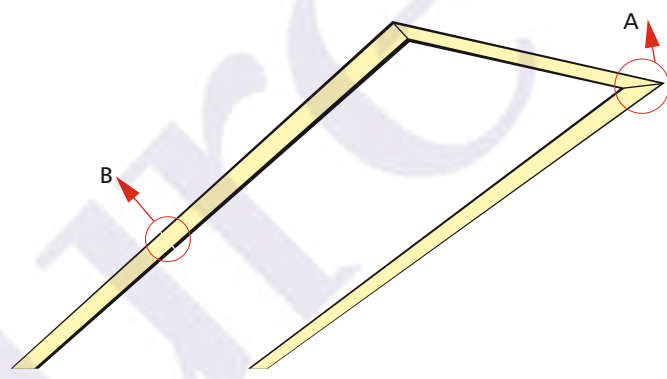

②




'I' joint

③




'L' joint

④

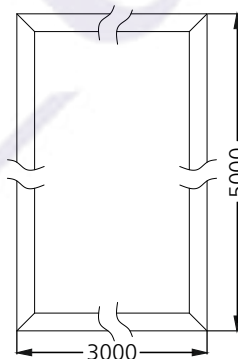

⑤

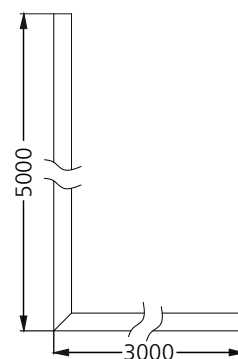


⑥


- Straight Sections (Profile) - Maximum possible straight length without any cuts on the profile is 3 mtrs. A hairline cut is visible at the joint, which is needed at every 3 mtrs interval. (Eg.) If a straight length of 9 mtrs is required, then two joints are needed; the 1st at 3 mtrs and the 2nd at 6 mtrs.
- Straight Sections (Diffuser) - Maximum possible straight length without any cuts on the diffuser is 30 mtrs. A hairline cut is visible at a joint, which is needed at every 30 mtrs interval. (Eg.) If a straight length of 32 mtrs is required, then one joint is required at 30 mtrs. Kindly Note: For this example, The number of profile joints is 10 (one at every 3 mtrs interval).
- For 'L' Sections - A Profile of lengths 300mm x 300mm is made. Then it is attached to the Straight Sections. (Eg.) If a L' section of 3 mtrs x 5 mtrs is required. First a 300mm x 300mm 'L' section is made. Then one straight section of 2.7 mtrs is joint to the 300mm x 300mm 'L' section on the 3 mtrs side. On the 5mtrs side, Two straight sections of lengths 3 mtrs and 1.7 mtrs are joint in tandem with the 300mm x 300mm 'L' section. (Refer to image 6 and image 2) Kindly Note - Although the profile will have 4 joints, the diffuser will have only one joint at the center.
- For Rectangular Sections - Similar in construction to the 'L' section, except the rectangular section consists of four 'L' sections of 300mm x 300mm that are connected by straight sections of the required lengths. (Refer to image 1, 2 and 5)
- 'I' Joint - An 'I' jointer is used to connect two straight sections. (Refer to image 3)
- 'L' Joint - two profiles are cut at an angle of 45 degrees and joint together using a 'L' jointer. (refer to image 4)

Photometric Graphs


Hue Bin vs Rf Graph

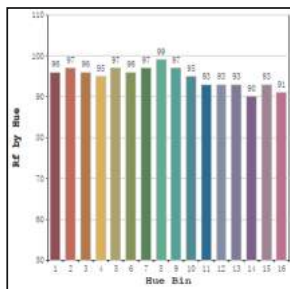


Color Vector Graph

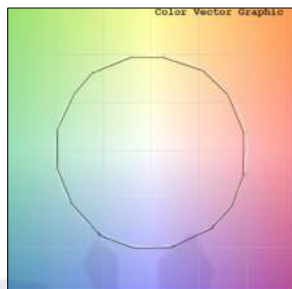

Spectrum vs Wavelength Graph

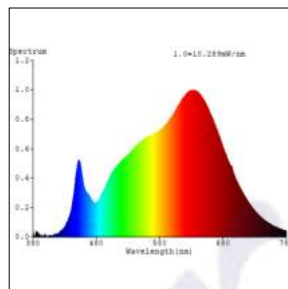

CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☐ Matt Black
- ☐ Custom RAL Color

Min Length

50MM

Max Length

3000MM

Diffuser

Standard Opal Diffuser
Microprismatic Opal Diffuser

Joint Options



'I' Joint



'L' Joint

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.