

Allura Round L - #1047



15W




1319lm



4000K






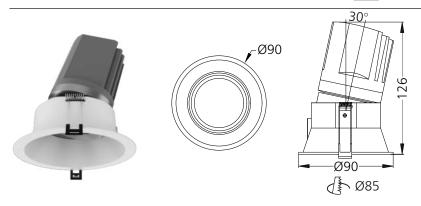




Photometric Data	
Light source	LED - Array
Power (W)	15W
Delivered lumens	1319lm
Source lumens	1980lm
Colour temperature (K)	4000K
Luminaire efficacy	87.97lm/W
Beam angle	24°
Cutoff angle	33°

Light output ratio	66%
Color rendering index (Ra)	>95
Color rendering index (R9)	>85
Binning MacAdam	<2 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Symmetric








g - Recessed 1-25mm
ension spring
table
st alm.
st alm.

Product weight	265gms
Safety class	III
Insulation class	III
LED current (mA)	350mA
Voltage	AC230V
Forward voltage	DC36V
Driver	CC - Remote




Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity
Graph



Finish Options

Trim Finish

- Matt White
- Matt Black
- Custom RAL Color

Interior Finish

Matt White

Filter Options



Honeycomb Filter



Diffusion Lens



Softening Lens

Above filters can be added to the fixture and need to be ordered as a separate accessory

Dimming Options



Constant Current Driver 15w 350mA 220-240V Non Dimmable



Constant Current Driver 15w 350mA 220-240V Dali Dimmable



Constant Current Driver 15w 350mA 220-240V Triac Dimmable



Constant Current Driver 15w 350mA 220-240V Dali Tunable



Constant Current Driver 15w 350mA 220-240V Analog 0-10V / 1-10V Dimmable



Constant Current Driver 15w 350mA 220-240V RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.

Due to which the data mentioned in the data sheet is subject to change without prior notice.