

# Aurele Outwards XL - #1417



72W




5890lm



4000K




Diffused

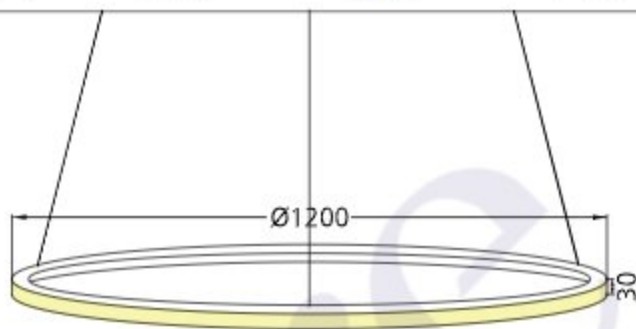

## Photometric Data

Light source	LED - Low Power
Power (W)	72W
Delivered lumens	5890lm
Source lumens	10008lm
Colour temperature (K)	4000K
Luminaire efficacy	81.80lm/W
Beam angle	Diffused
Cutoff angle	NA

Light output ratio	58%
Color rendering index (Ra)	>92
Color rendering index (R9)	>50
Binning MacAdam	<3 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Diffused

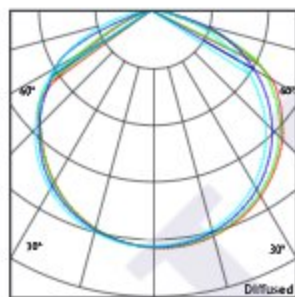


## Technical Data

Mounting detail	Ceiling - Pendant
Fixing detail	Hanging Wire
Orientation	Fixed
IP rating	IP20
Glow wire test	850°
Trim material	Aluminium
Heatsink material	Aluminium


Product weight	906gms
Safety class	III
Insulation class	III
Voltage	AC230V
Forward voltage	DC24V
Driver	CV - Remote

## Photometric Graphs


Hue Bin vs Rf Graph

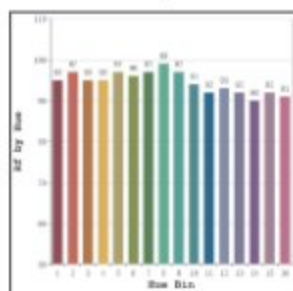


Color Vector Graph

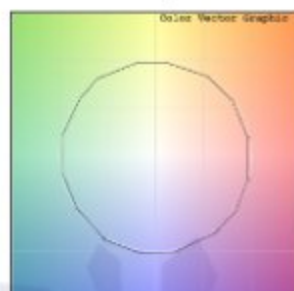

Spectrum vs Wavelength Graph

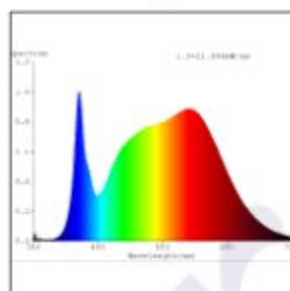

CIE Chromaticity Graph

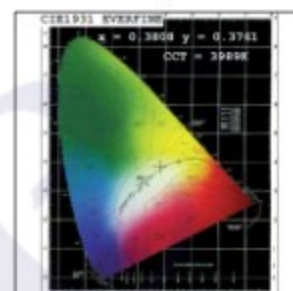

## Finish Options

### Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

### Interior Finish

NA

## Dimming Options



Constant Voltage Driver  
DC24V  
Non Dimmable



Constant Voltage Driver  
DC24V  
Triac Dimmable



Constant Voltage Driver  
DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
DC24V  
Dali Dimmable



Constant Voltage Driver  
DC24V  
Dali Tunable



Constant Voltage Driver  
DC24V  
RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.