

Side Bend M-IP65 - #2174



10W/M





720lm/m to 860lm/m



2700K to 6500K




Diffused

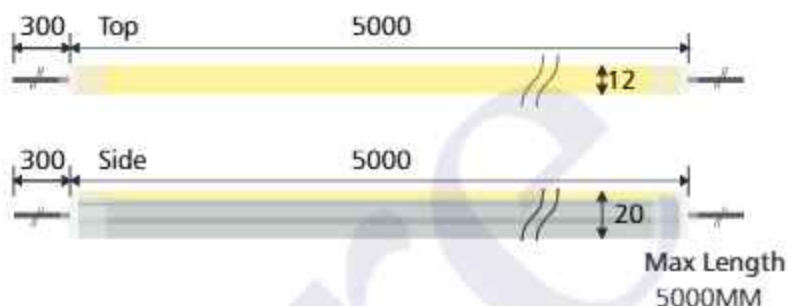

Photometric Data

Light source	LED - Low Power	Light output ratio	57%
Power (W)	10W/M	Color rendering index (Ra)	> 92
Delivered lumens	720lm/m to 860lm/m	Color rendering index (R9)	> 50
Source lumens	1260lm/m to 1490lm/m	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K to 6500K	LED life	L90 B10 Tj75°C
Luminaire efficacy	72lm/W to 86lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Direct - Diffused



Technical Data

Mounting detail	Profile or Clamp Mounted	Safety class	III
Fixing detail	Screw Mounting	Insulation class	III
Orientation	Fixed	Driver Input Voltage	AC230V
IP rating	IP65	Flexum voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

