

# Side Bend M - IP65 - #2174



12W/M





865lm/m



3000K




Diffused

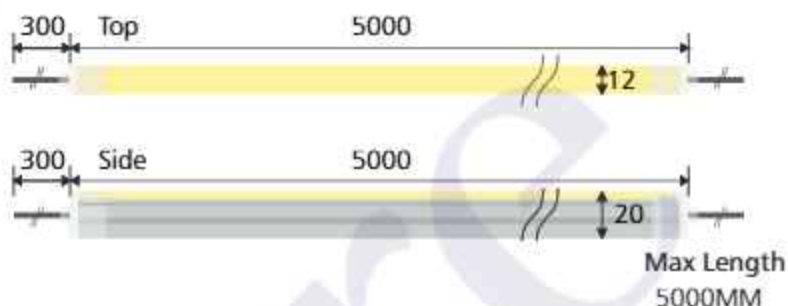

## Photometric Data

|                        |                 |                            |                   |
|------------------------|-----------------|----------------------------|-------------------|
| Light source           | LED - Low Power | Light output ratio         | 55%               |
| Power (W)              | 12W/M           | Color rendering index (Ra) | > 92              |
| Delivered lumens       | 865lm/m         | Color rendering index (R9) | > 50              |
| Source lumens          | 1572lm/m        | Binning MacAdam            | < 3 SDCM          |
| Colour temperature (K) | 3000K           | LED life                   | L90 B10 Tj75°C    |
| Luminaire efficacy     | 72.08lm/W       | Operating temperature      | -20°C to +50°C    |
| Beam angle             | Diffused        | Light distribution         | Direct - Diffused |




## Technical Data


|                 |                          |                      |             |
|-----------------|--------------------------|----------------------|-------------|
| Mounting detail | Profile or Clamp Mounted | Safety class         | III         |
| Fixing detail   | Screw Mounting           | Insulation class     | III         |
| Orientation     | Fixed                    | Driver Input Voltage | AC230V      |
| IP rating       | IP65                     | Flexum voltage       | DC24V       |
| Glow wire test  | 850°                     | Driver               | CV - Remote |

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Accessories Options



Side Bend  
Radius 300mm



Front  
Cable Entry



Side  
Cable Entry



Bottom  
Cable Entry



Mounting  
Chain



Mounting  
Clamp



Mounting  
Profile

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.