

Top Bend S - IP67 - #2192



10W/M





775lm/m to 915lm/m



2700K to 6500K




Diffused

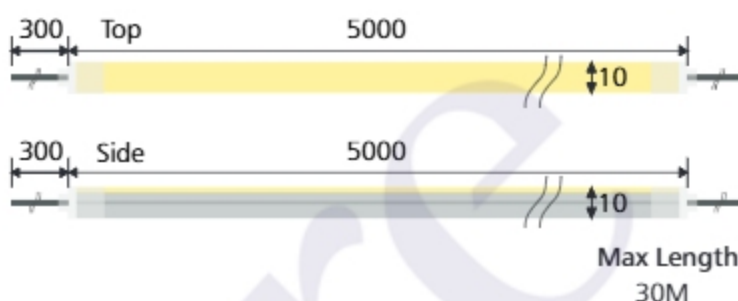

Photometric Data

Light source	LED - Low Power	Light output ratio	61%
Power (W)	10W/M	Color rendering index (Ra)	> 92
Delivered lumens	775lm/m to 915lm/m	Color rendering index (R9)	> 50
Source lumens	1260lm/m to 1490lm/m	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K to 6500K	LED life	L90 B10 Tj75°C
Luminaire efficacy	77lm/W to 91lm/W	Operating temperature	-20°C to + 50°C
Beam angle	Diffused	Light distribution	Direct - Diffused




Technical Data


Mounting detail	Profile or Clamp Mounted	Safety class	III
Fixing detail	Screw Mounting	Insulation class	III
Orientation	Fixed	Driver Input Voltage	AC230V
IP rating	IP67	Flexum voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph

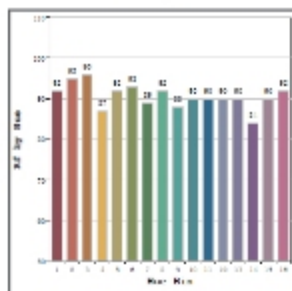






Color Vector Graph

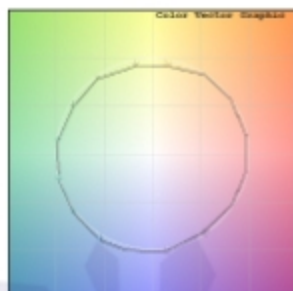

Spectrum vs Wavelength Graph

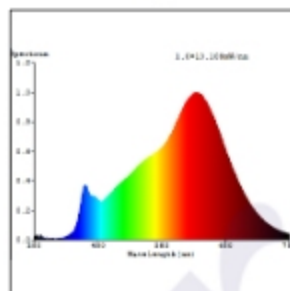


CIE Chromaticity Graph

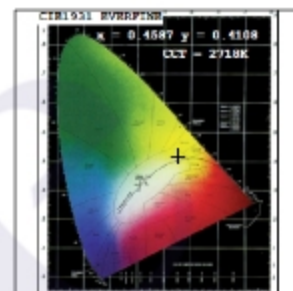


Accessories Options




Top Bend
Radius 300mm



Front
Cable Entry



Side
Cable Entry



Bottom
Cable Entry



Mounting
Chain



Mounting
Clamp



Mounting
Profile

Dimming Options



Constant Voltage Driver
75w DC24V
Dali Tunable



L'azure Exclusive 30 Meter Single length.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.