

Hypogean Fix R6 - #3039



12W





852lm



Green





Asymmetric



Photometric Data

Light source	LED - High Power
Power (W)	12W
Delivered lumens	852lm
Source lumens	1320lm
Colour temperature (K)	Green
Luminaire efficacy	71.06lm/W

Beam angle	Asymmetric
Light output ratio	64%
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Asymmetric

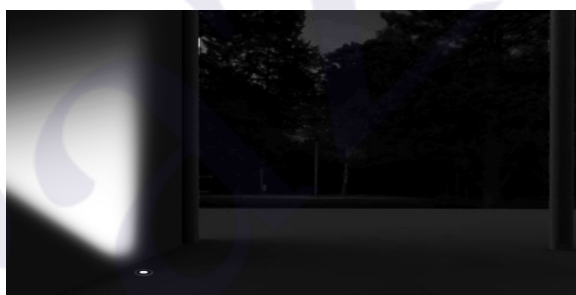

Technical Data

Mounting detail	Inground Light
Fixing detail	Backbox
Orientation	Fixed
IP rating	IP67
IK rating	IK08
Heatsink material	Diecast alm.
Ring material	SS

Glow wire test	850°
Product weight	924gms
Safety class	III
Insulation class	III
Voltage	DC24V
Driver	Remote - DC24V

Finish Options

Trim Finish

- ☐ SS
- ☒ Custom RAL Color

Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver