

# Hypogean Fix R6 - #3039



6W





228lm



Blue





Asymmetric



## Photometric Data

Light source	LED - High Power	Beam angle	Asymmetric
Power (W)	6W	Light output ratio	66%
Delivered lumens	228lm	LED life	L90 B10 Tj75°C
Source lumens	342lm	UGR	<19
Colour temperature (K)	Blue	Operating temperature	-20°C to +50°C
Luminaire efficacy	38.14lm/W	Light distribution	Asymmetric

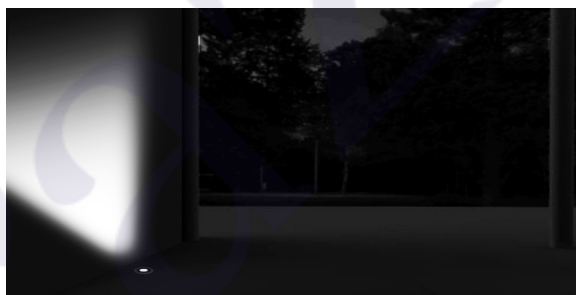

## Technical Data

Mounting detail	Inground Light	Glow wire test	850°
Fixing detail	Backbox	Product weight	924gms
Orientation	Fixed	Safety class	III
IP rating	IP67	Insulation class	III
IK rating	IK08	Voltage	DC24V
Heatsink material	Diecast alm.	Driver	Remote - DC24V
Ring material	SS		

## Finish Options

### Trim Finish

- ☐ SS
- ☒ Custom RAL Color

## Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver