

# Hypogean Fix R9 - #3040



18W





736lm



Blue





45°



## Photometric Data

|                        |                  |                       |                    |
|------------------------|------------------|-----------------------|--------------------|
| Light source           | LED - High Power | Beam angle            | 45°                |
| Power (W)              | 18W              | Light output ratio    | 71%                |
| Delivered lumens       | 736lm            | LED life              | L90 B10 Tj75°C     |
| Source lumens          | 1026lm           | UGR                   | <19                |
| Colour temperature (K) | Blue             | Operating temperature | -20°C to +50°C     |
| Luminaire efficacy     | 40.93lm/W        | Light distribution    | Direct - Symmetric |

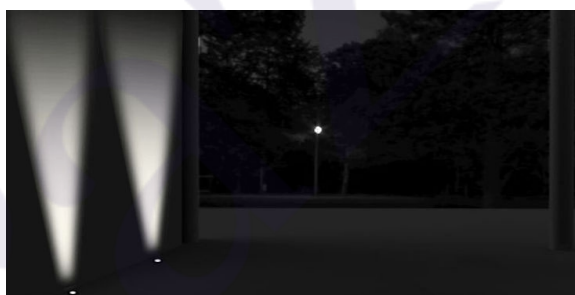

## Technical Data

|                   |                |                  |                |
|-------------------|----------------|------------------|----------------|
| Mounting detail   | Inground Light | Glow wire test   | 850°           |
| Fixing detail     | Backbox        | Product weight   | 1185gms        |
| Orientation       | Fixed          | Safety class     | III            |
| IP rating         | IP67           | Insulation class | III            |
| IK rating         | IK08           | Voltage          | DC24V          |
| Heatsink material | Diecast alm.   | Driver           | Remote - DC24V |
| Ring material     | SS             |                  |                |

## Finish Options

### Trim Finish

- ☐ SS
- ☒ Custom RAL Color

## Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver