

# Incis - Lean - #2218



24W




2622lm



3000K





24°

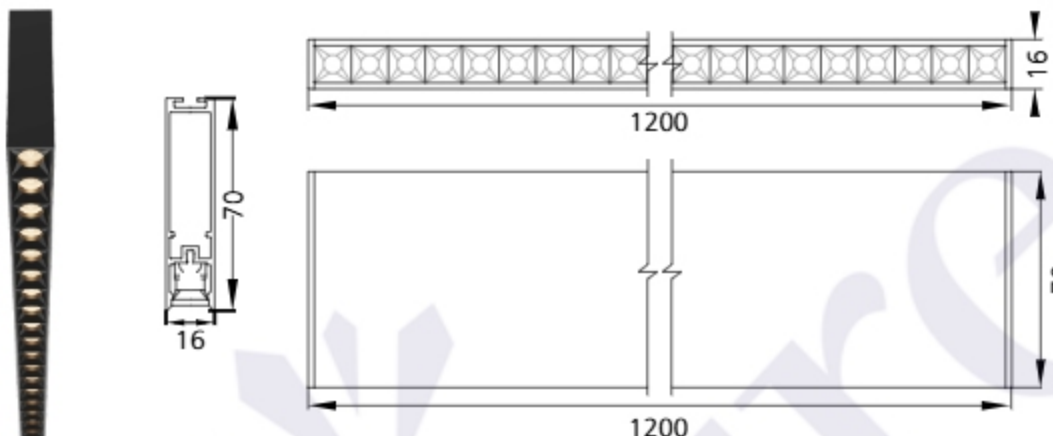

## Photometric Data

Light source	LED - High Power	Light output ratio	83%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2622lm	Color rendering index (R9)	> 50
Source lumens	3144lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	109lm/W	UGR	< 19
Beam angle	24°	Operating temperature	-20°C to + 50°C
Cutoff angle	23°	Light distribution	Direct - Symmetric

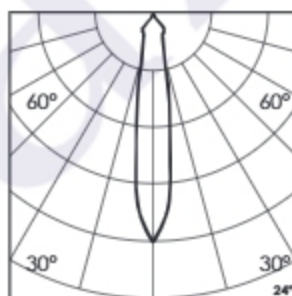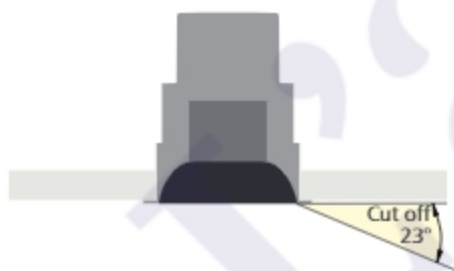


## Technical Data


Mounting detail	Pendant	Product weight	732gms
Fixing detail	Suspension Wire	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	NA	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

## Photometric Graphs


Hue Bin vs Rf Graph

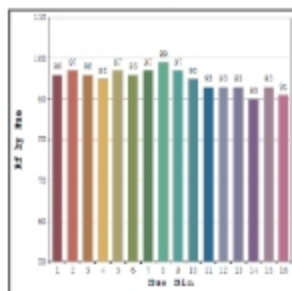


Color Vector Graph

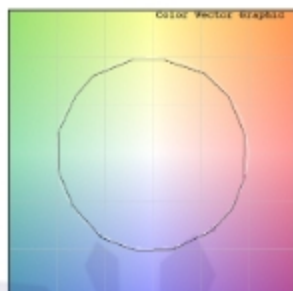

Spectrum vs Wavelength Graph

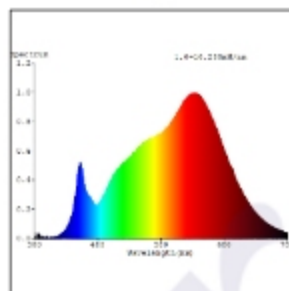

CIE Chromaticity Graph

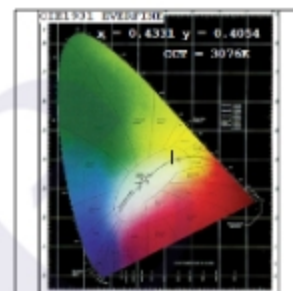

## Finish Options

### Body Finish

- Matt White
- Matt Black
- Custom RAL Color

### Reflector Finish

- Matt Black

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.