

Incis - Lean - #2218



48W




5412lm



4000K




24°

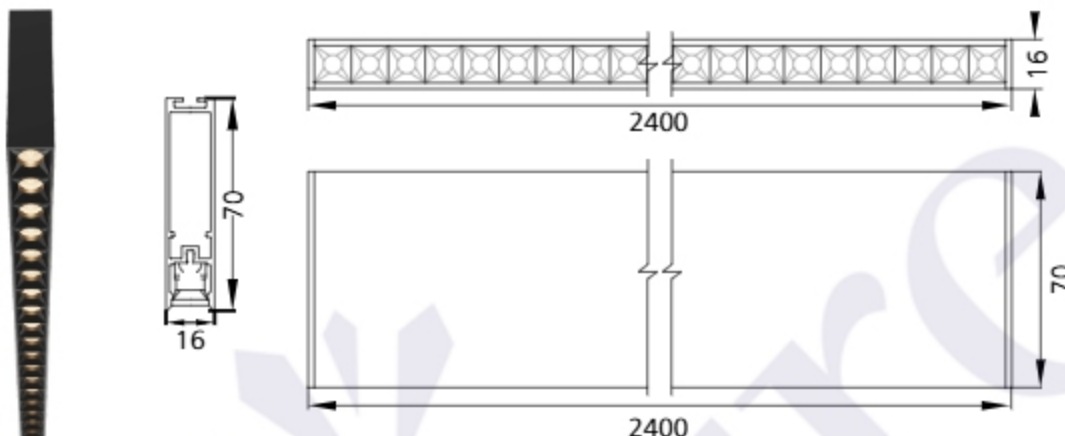

Photometric Data

Light source	LED - High Power	Light output ratio	81%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	5412lm	Color rendering index (R9)	> 50
Source lumens	6672lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	112lm/W	UGR	< 19
Beam angle	24°	Operating temperature	-20°C to + 50°C
Cutoff angle	23°	Light distribution	Direct - Symmetric

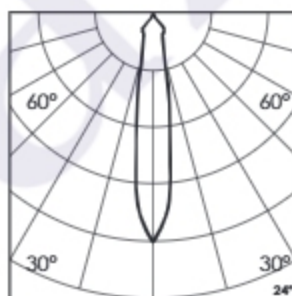


Technical Data


Mounting detail	Pendant	Product weight	1464gms
Fixing detail	Suspension Wire	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	NA	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph

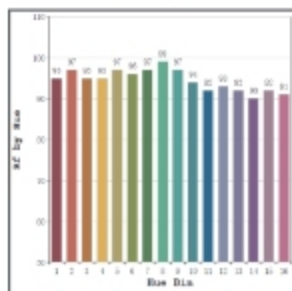


Color Vector Graph

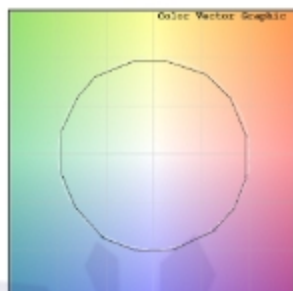

Spectrum vs Wavelength Graph

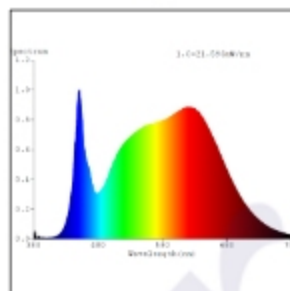

CIE Chromaticity Graph

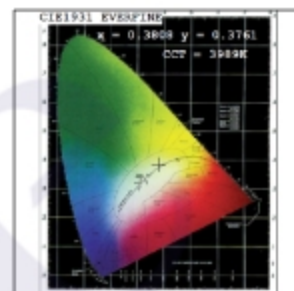

Finish Options

Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Matt Black

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.