


## Joule Discreet Magnetic - Track

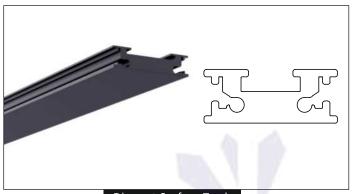

Discreet Surface Track #2248

- Shows an isometric render & 2D view of Joule Discreet Magnetic

   Track. Joule Discreet can only be mounted at the surface but because the product is 7 mm slim it blends with the ceiling.
- Available accessories that are needed for the installation of Joule Discreet Magnetic-Track are mentioned below. Accessories needs to be ordered separately.
- With the accessory "Wall Hanging Swinging Head" Joule discreet can be used for wall mounted installations as well.

#### Accesories



Wall Hanging Swinging Head



Head Module



1 Jointer



Corner Module



Inward Corner Module



Input Module



- Shows an isometric render & 2D view of a Joule Discreet Power Supply.
- The power supply must be ordered separately.



# Discreet - Reading Light - #2238



2W




171lm



3000K






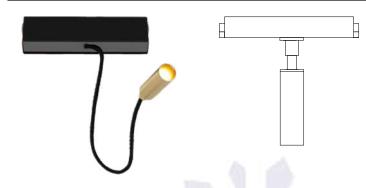

Photometric Data	
Light source	LED - High Power
Power (W)	2W
Delivered lumens	171lm
Source lumens	262lm
Colour temperature (K)	3000K
Luminaire efficacy	85.50/W
Beam angle	15°
Cutoff angle	NA

Light output ratio	65%
Color rendering index (Ra)	>92
Color rendering index (R9)	>50
Binning MacAdam	<3 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Symmetric






Technical Data	
Mounting detail	Recessed
Fixing detail	Dual tension spring
Orientation	Fixed
IP rating	IP20
Glow wire test	850°
Trim material	Aluminium
Heatsink material	Aluminium Extrusion

Product weight	218gms
Safety class	III
Insulation class	III
Voltage	AC230V
Forward voltage	DC24V
Driver	CV - Remote




#### **Photometric Graphs**


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



#### **Finish Options**

#### **Body Finish**

Matt Black

Custom RAL Color

### **Reflector Finish**

Matt Black

#### **Dimming Options**



Non Dimmable Remote Driver