

Kosmos - Flexi Wash - #2213



24W/M





2095lm/m



4000K




25x100°

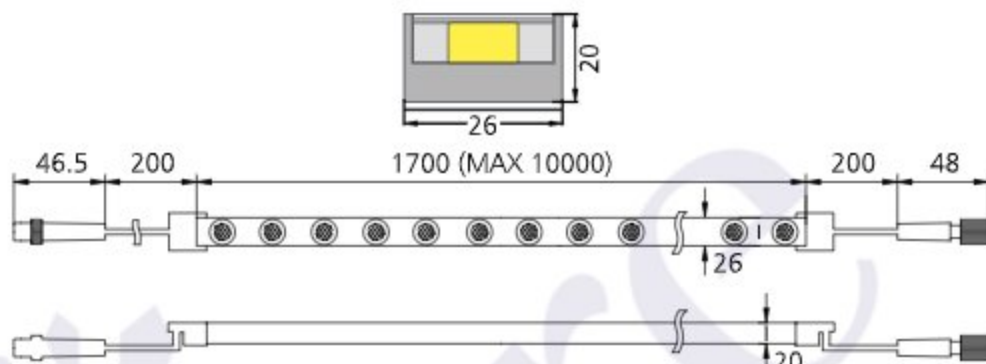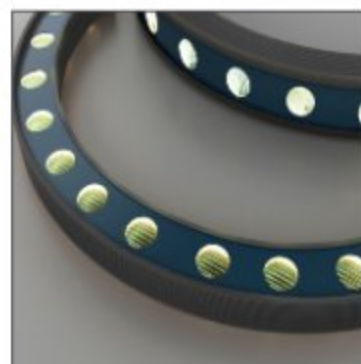

Photometric Data

Light source	LED - High Power	Light output ratio	61%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2095lm/m	Color rendering index (R9)	>50
Source lumens	3420lm/m	Binning MacAdam	<2 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.29lm/W	UGR	<19
Beam angle	25x100°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Grazer




Technical Data


Mounting detail	Inground	Product weight	480gms Per 1000MM
Fixing detail	Mounting Clamp / Profile	Safety class	III
Orientation	Top & Side Bendable	Insulation class	III
IP rating	IP67	Driver Input Voltage	AC230V
Glow wire test	850°	Fixture voltage	DC24V
Trim material	NA	Driver	CV - Remote
Material	Silicone		

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☐ Matt Grey
- ☒ Custom RAL Color


Length

5000MM

Accessories Options



Top & Side
Bendable
Radius 300mm



Bottom
Cable Entry



Mounting
Profile



Mounting
Clamp Fix



Mounting
Clamp Adj.

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.