

Marcopia Square 3 - #3006



9W





517lm



Red





60°

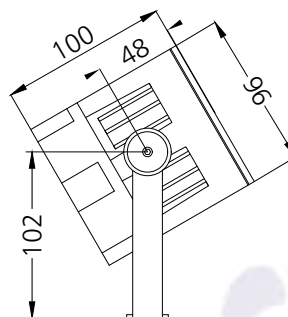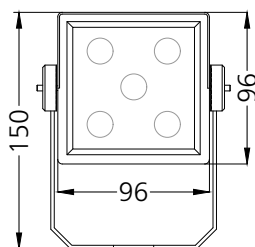

Photometric Data

Light source	LED - High Power	Beam angle	60°
Power (W)	9W	Light output ratio	85%
Delivered lumens	517lm	LED life	L90 B10 Tj75°C
Source lumens	612lm	UGR	<19
Colour temperature (K)	Red	Operating temperature	-20°C to +50°C
Luminaire efficacy	57.48lm/W	Light distribution	Direct - Symmetric

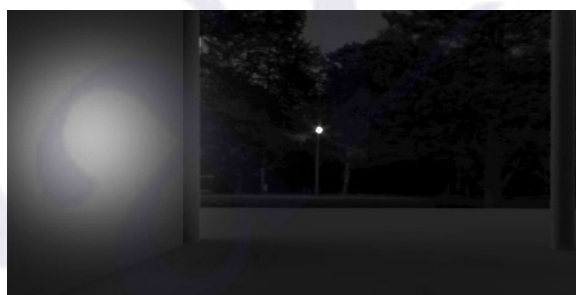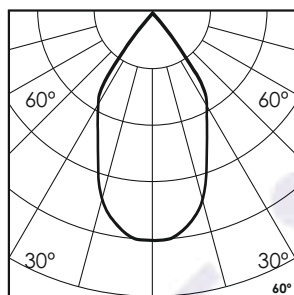

Technical Data

Mounting detail	Surface Uplighter	Heatsink material	Diecast alm.
Fixing detail	Cowl / Spike / Mounting Bracket	Product weight	928gms
Orientation	Adjustable	Safety class	III
IP rating	IP65	Insulation class	III
IK rating	IK05	Voltage	DC24V
Glow wire test	850°	Driver	Remote - DC24V

Finish Options

Body Finish

- Matt Grey
- Matt Black
- Custom RAL Color

Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

Accessories Options



Cowl



Spike

Above accessories can be added to the fixture and need to be ordered as a separate accessory

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.