


## Numinous - Profile M



**Recessed M**  
#2120

- Choose Profile - Numinous Recessed M #2120
- Choose the desired Jointer 'I' or 'L' depending on the requirement. Note :- The maximum available straight length is 3000mm
- Choose the desired modules i.e Brick - 133mm, Circle - 133mm, Wash - 133mm, Diffused - 150mm or Blank. The overall length of the Numinous fixture is dependent on the no of modules selected. Note :- All of this modules can be used besides one another. Blank Module can be used where no desired lighting is required to achieved seamless installation.

### Jointer



'I' Jointer



'L' Jointer




**Pendant M**  
#2121

- Choose Profile - Numinous Pendant M #2121
- Choose the desired Jointer 'I' or 'L' depending on the requirement. Note :- The maximum available straight length is 3000mm
- Choose the desired modules i.e Brick - 133mm, Circle - 133mm, Wash - 133mm, Diffused - 150mm or Blank. The overall length of the Numinous fixture is dependent on the no of modules selected. Note :- All of this modules can be used besides one another. Blank Module can be used where no desired lighting is required to achieved seamless installation.

### Jointer



'I' Jointer



'L' Jointer

### Connection Module



**L - Module**  
300x33x34 - 2



**+ - Module**  
300x33x34 - 4



**X - Module**  
300x33x34 - 4



M - Blank

M - Wash 133

M - Circle 133

M - Diffused 150

M - Brick 133

M - Blank

# Module M - Circle 133 - #2124



10W





938lm



3000K





24°

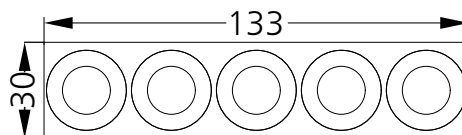

## Photometric Data

Light source	LED - High Power	Light output ratio	68%
Power (W)	10W	Color rendering index (Ra)	> 92
Delivered lumens	938lm	Color rendering index (R9)	> 50
Source lumens	1375lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	93.81lm/W	UGR	< 16
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

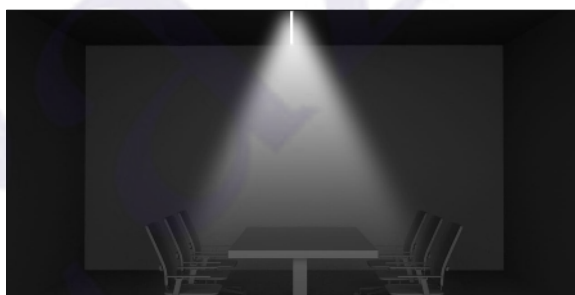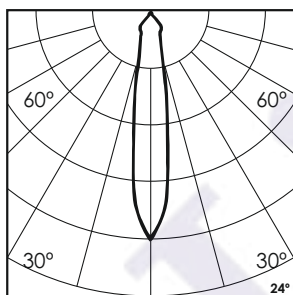


## Technical Data


Mounting detail	Recessed / Pendant	Product weight	102gms Per 133MM
Fixing detail	Spring / Suspension Wire	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V / DC24V
Trim material	Aluminium	Forward voltage	DC36V
Heatsink material	Aluminium Extrusion	Driver	Remote - Recessed In-built - Pendant

## Photometric Graphs


Hue Bin vs Rf Graph

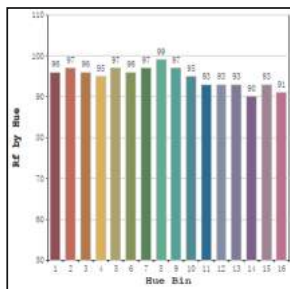


Color Vector Graph

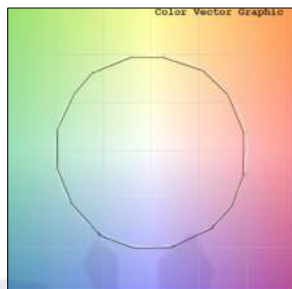

Spectrum vs Wavelength Graph

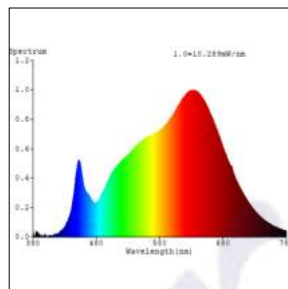

CIE Chromaticity Graph

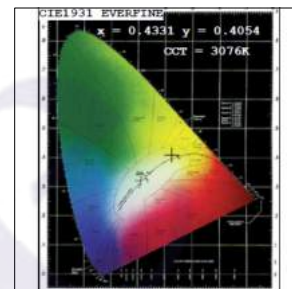

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

### Reflector Finish

- ☒ Specular
- ☐ Pearl Black

## Dimming Options



Non Dimmable  
Remote / In-built Driver



Triac Dimmable  
Remote / In-built Driver



Analog 0-10V / 1-10V Dimmable  
Remote / In-built Driver



Dali Dimmable  
Remote / In-built Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.