

Numinous - Profile M



Recessed M
#2120

- Choose Profile - Numinous Recessed M #2120
- Choose the desired Joints 'I' or 'L' depending on the requirement. Note :- The maximum available straight length is 3000mm
- Choose the desired modules i.e Brick - 133mm, Circle - 133mm, Wash - 133mm, Diffused - 150mm or Blank. The overall length of the Numinous fixture is dependent on the no of modules selected. Note :- All of this modules can be used besides one another. Blank Module can be used where no desired lighting is required to achieved seamless installation.

Jointer



'I' Jointer




'L' Jointer




Pendant M
#2121

- Choose Profile - Numinous Pendant M #2121
- Choose the desired Joints 'I' or 'L' depending on the requirement. Note :- The maximum available straight length is 3000mm
- Choose the desired modules i.e Brick - 133mm, Circle - 133mm, Wash - 133mm, Diffused - 150mm or Blank. The overall length of the Numinous fixture is dependent on the no of modules selected. Note :- All of this modules can be used besides one another. Blank Module can be used where no desired lighting is required to achieved seamless installation.

Jointer



'I' Jointer



'L' Jointer

Connection Module



L - Module
300x33x34 - 2



+ - Module
300x33x34 - 4



X - Module
300x33x34 - 4



M - Blank

M - Wash 133

M - Circle 133

M - Diffused 150

M - Brick 133

M - Blank

Module M - Diffused 150 - #2127



3W




288lm



6500K





Diffused

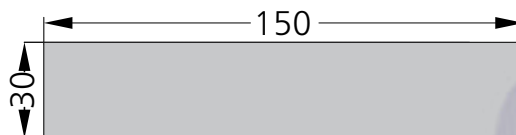

Photometric Data

Light source	LED - High Power
Power (W)	3W
Delivered lumens	288lm
Source lumens	442lm
Colour temperature (K)	6500K
Luminaire efficacy	96lm/W
Beam angle	Diffused
Cutoff angle	NA

Light output ratio	65%
Color rendering index (Ra)	>92
Color rendering index (R9)	>50
Binning MacAdam	<3 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Diffused

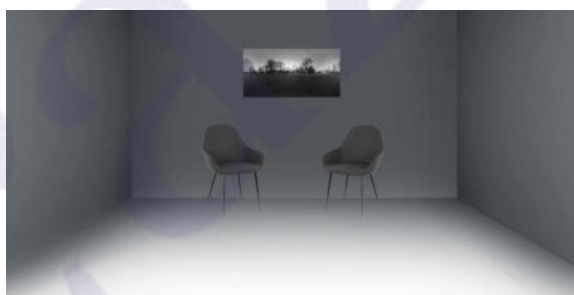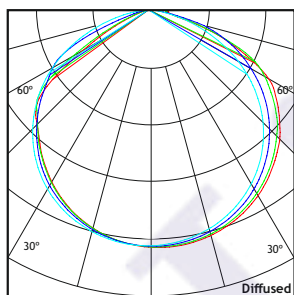


Technical Data

Mounting detail	Recessed / Pendant
Fixing detail	Spring / Suspension Wire
Orientation	Fixed
IP rating	IP20
Glow wire test	850°
Trim material	Aluminium
Heatsink material	Aluminium Extrusion


Product weight	116gms Per 150MM
Safety class	III
Insulation class	III
LED current (mA)	Depend on length
Voltage	AC230V / DC24V
Forward voltage	DC36V
Driver	Remote - Recessed In-built - Pendant

Photometric Graphs


Hue Bin vs Rf Graph

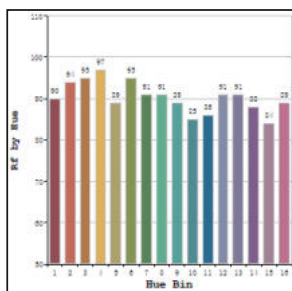


Color Vector Graph

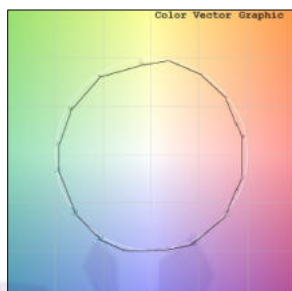

Spectrum vs Wavelength Graph

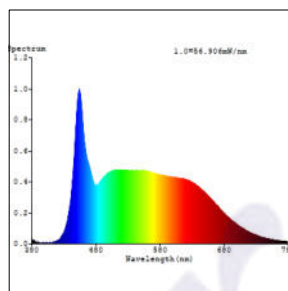

CIE Chromaticity Graph

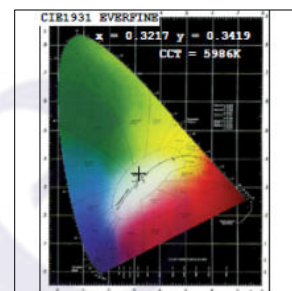

Finish Options

Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Non Dimmable
Remote / In-built Driver



Triac Dimmable
Remote / In-built Driver



Analog 0-10V / 1-10V Dimmable
Remote / In-built Driver



Dali Dimmable
Remote / In-built Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.