

Opus Exterior XL TL - #1174



35W



2770lm




4000K









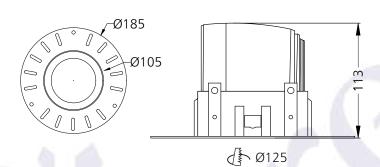

Photometric Data		
Light source	LED - Array	
Power (W)	35W	
Delivered lumens	2770lm	
Source lumens	4620lm	
Colour temperature (K)	4000K	
Luminaire efficacy	79.14lm/W	
Beam angle	15°	
Cutoff angle	18°	

59%	
>95	
>85	
<2 SDCM	
L90 B10 Tj75°C	
<19	
-20°C to +50°C	
Direct - Symmetric	








Technical Data	
Mounting detail	Ceiling - Recessed 1-25mm
Fixing detail	Dual tension spring
Orientation	Fixed
IP rating	IP65
Glow wire test	850°
Trim material	NA
Heatsink material	Diecast alm.

Product weight	1000gms
Safety class	III
Insulation class	III
LED current (mA)	900mA
Voltage	AC230V
Forward voltage	DC36V
Driver	CC - Remote




Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity
Graph



Finish Options

Trim Finish

- Matt White
- Matt Black
- Custom RAL Color

Reflector Finish

- Matt White
- Matt Black
- Specular
- Pearl Black
- Black Chrome
- Matt Silver
- Matt Gold

Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

Dimming Options



Constant Current Driver 35w 900mA 220-240V Non Dimmable



Constant Current Driver 35w 900mA 220-240V Dali Dimmable



Constant Current Driver 35w 900mA 220-240V Triac Dimmable



Constant Current Driver 35w 900mA 220-240V Dali Tunable



Constant Current Driver 35w 900mA 220-240V Analog 0-10V / 1-10V Dimmable



Constant Current Driver 35w 900mA 220-240V RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.

Due to which the data mentioned in the data sheet is subject to change without prior notice.