

Peculo Pole Stem - #3111



40W




4860lm



4000K



Diffused

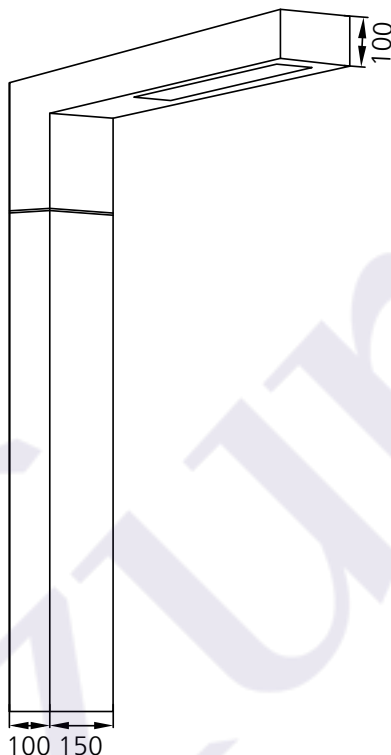

Photometric Data

Light source	LED - High Power
Power (W)	40W
Delivered lumens	4860lm
Source lumens	5920lm
Colour temperature (K)	4000K
Luminaire efficacy	121lm/W
Height	4.0m / 6.0m

Light output ratio	82%
Color rendering index (Ra)	>82
Binning MacAdam	<3 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Diffused


Technical Data

Mounting detail	Floor - Surface
Fixing detail	Foundation Bolt
Orientation	Fixed
IP rating	IP65
IK rating	IK06
Glow wire test	850°


Body material	Galvanized Steel
Heatsink material	Diecast alm.
Safety class	III
Insulation class	III
Voltage	AC230V
Driver	In-built

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- Matt Black
- Matt Grey
- Custom RAL Color

Dimming Options



Constant Current Driver
40w 220-240V
Non Dimmable



Constant Current Driver
40w 220-240V
Triac Dimmable



Constant Current Driver
40w 220-240V
Analog 0-10V / 1-10V Dimmable



Constant Current Driver
40w 220-240V
Dali Dimmable