

# Shuays Fountain F9 - #3060



18W





938lm



Red




15°

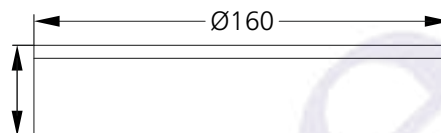

Note :  
This Luminaire can not be operated  
out of water for over 15 minutes.

## Photometric Data

|                        |                  |                       |                    |
|------------------------|------------------|-----------------------|--------------------|
| Light source           | LED - High Power | Beam angle            | 15°                |
| Power (W)              | 18W              | Light output ratio    | 76%                |
| Delivered lumens       | 938lm            | LED life              | L90 B10 Tj75°C     |
| Source lumens          | 1224lm           | UGR                   | <19                |
| Colour temperature (K) | Red              | Operating temperature | -20°C to +50°C     |
| Luminaire efficacy     | 52.12lm/W        | Light distribution    | Direct - Symmetric |



## Technical Data

|                   |                          |                  |                |
|-------------------|--------------------------|------------------|----------------|
| Mounting detail   | Surface Underwater Light | Glow wire test   | 850°           |
| Fixing detail     | Nozzle Mounted           | Product weight   | 1096gms        |
| Orientation       | Fixed                    | Safety class     | III            |
| IP rating         | IP68                     | Insulation class | III            |
| IK rating         | IK07                     | Voltage          | DC24V          |
| Heatsink material | SS                       | Driver           | Remote - DC24V |
| Ring material     | SS                       |                  |                |

## Finish Options

### Body Finish

- ☐ SS
- ☒ Custom RAL Color

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver