

Shuays Fountain F9 - #3060



27W





1580lm



Red




60°

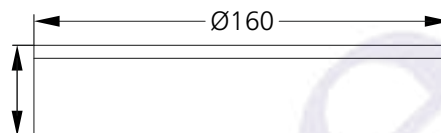

Note :
This Luminaire can not be operated
out of water for over 15 minutes.

Photometric Data

Light source	LED - High Power	Beam angle	60°
Power (W)	27W	Light output ratio	86%
Delivered lumens	1580lm	LED life	L90 B10 Tj75°C
Source lumens	1836lm	UGR	<19
Colour temperature (K)	Red	Operating temperature	-20°C to +50°C
Luminaire efficacy	58.52lm/W	Light distribution	Direct - Symmetric



Technical Data

Mounting detail	Surface Underwater Light	Glow wire test	850°
Fixing detail	Nozzle Mounted	Product weight	1096gms
Orientation	Fixed	Safety class	III
IP rating	IP68	Insulation class	III
IK rating	IK07	Voltage	DC24V
Heatsink material	SS	Driver	Remote - DC24V
Ring material	SS		

Finish Options

Body Finish

- ☐ SS
- ☒ Custom RAL Color

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver