Swivel - Capsule M TL - #1219

L'azure
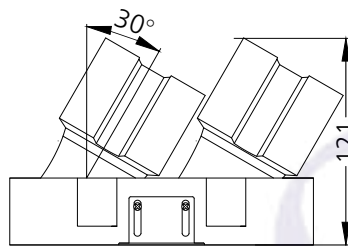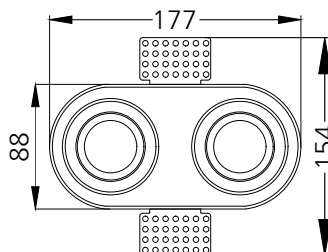
2x20W | 2x1819lm | 4000K | 38°

Photometric Data

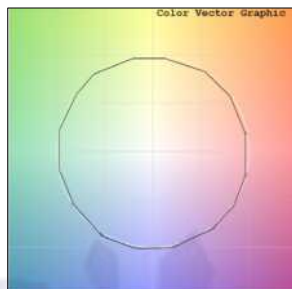|			
Light source	LED - Array	Light output ratio	68%
Power (W)	2x20W	Color rendering index (Ra)	>95
Delivered lumens	2x1819lm	Color rendering index (R9)	>85
Source lumens	2x2640lm	Binning MacAdam	<2 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	90.95lm/W	UGR	<19
Beam angle	38°	Operating temperature	-20°C to +50°C
Cutoff angle	19°	Light distribution	Direct - Symmetric
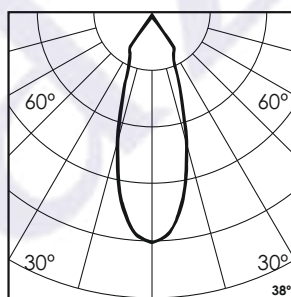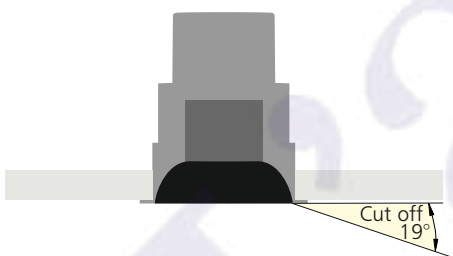
Technical Data

|			
Mounting detail	Ceiling - Recessed 1-25mm	Product weight	664gms
Fixing detail	Mounting with Screw	Safety class	III
Orientation	Adjustable	Insulation class	III
IP rating	IP20	LED current (mA)	500mA
Glow wire test	850°	Voltage	AC230V
Trim material	NA	Forward voltage	DC36V
Heatsink material	Diecast alm.	Driver	CC - Remote

Photometric Graphs
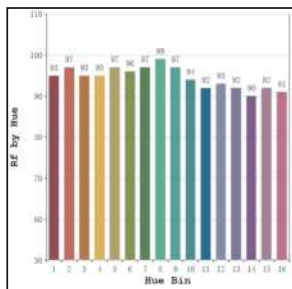
Hue Bin vs Rf Graph	Color Vector Graph	Spectrum vs Wavelength Graph	CIE Chromaticity Graph
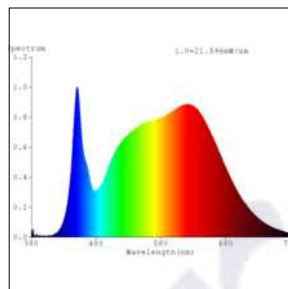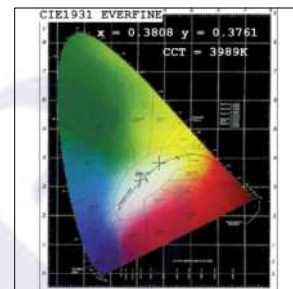
Finish Options

Trim Finish

○ Matt White
● Matt Black
🌈 Custom RAL Color

Interior Finish

○ Matt White
● Matt Black
⚪ Matt Silver
🟤 Matt Gold

Filter Options

Honeycomb Filter

Softening Lens

Above filters can be added to the fixture and need to be ordered as a separate accessory

Dimming Options

Constant Current Driver
20w 500mA 220-240V
Non Dimmable

Constant Current Driver
20w 500mA 220-240V
Triac Dimmable

Constant Current Driver
20w 500mA 220-240V
Analog 0-10V / 1-10V Dimmable

Constant Current Driver
20w 500mA 220-240V
Dali Dimmable

Constant Current Driver
20w 500mA 220-240V
Dali Tunable

Constant Current Driver
20w 500mA 220-240V
RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.