

# Vibrance Wall Duo SL - #3090



2x20W





2x1751lm



2700K





24°

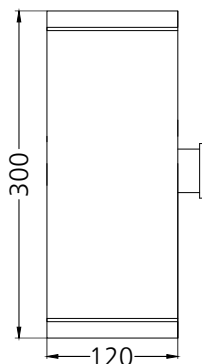

## Photometric Data

Light source	LED - Array	Light output ratio	71%
<u>Body Finish</u>		Color rendering index (Ra)	>95
Power (W)	2x20W	Color rendering index (R9)	>85
Delivered lumens	2x1751lm	Binning MacAdam	<2 SDCM
Source lumens	2x2440lm	LED life	L90 B10 Tj75°C
Colour temperature (K)	2700K	UGR	<19
Luminaire efficacy	87.56lm/W	Operating temperature	-20°C to +50°C
Beam angle	24°	Light distribution	Direct - Symmetric
Cutoff angle	NA		

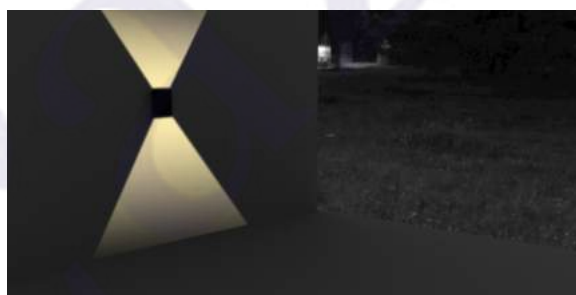


## Technical Data


Mounting detail	Surface	Product weight	1170gms
Fixing detail	Mounting with Screw	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP65	LED current (mA)	500mA
Glow wire test	850°	Voltage	AC230V
Trim material	NA	Forward voltage	DC36V
Heatsink material	Diecast alm.	Driver	In-built

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Body Finish

- ☐ Matt White
- ☐ Matt Black
- ☐ Matt Grey
- ☒ Custom RAL Color


## Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

## Dimming Options



Constant Current Driver  
20w 500mA 220-240V  
Non Dimmable



Constant Current Driver  
20w 500mA 220-240V  
Triac Dimmable



Constant Current Driver  
20w 500mA 220-240V  
Analog 0-10V / 1-10V Dimmable



Constant Current Driver  
20w 500mA 220-240V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.