

# iSkew Fix - #1308



7W





610lm



3000K





15°



## Photometric Data

|                        |             |                            |                    |
|------------------------|-------------|----------------------------|--------------------|
| Light source           | LED - Array | Light output ratio         | 72%                |
| Power (W)              | 7W          | Color rendering index (Ra) | >95                |
| Delivered lumens       | 610lm       | Color rendering index (R9) | >85                |
| Source lumens          | 847lm       | Binning MacAdam            | <2 SDCM            |
| Colour temperature (K) | 3000K       | LED life                   | L90 B10 Tj75°C     |
| Luminaire efficacy     | 87.14lm/W   | UGR                        | <19                |
| Beam angle             | 15°         | Operating temperature      | -20°C to +50°C     |
| Cutoff angle           | 30°         | Light distribution         | Direct - Symmetric |

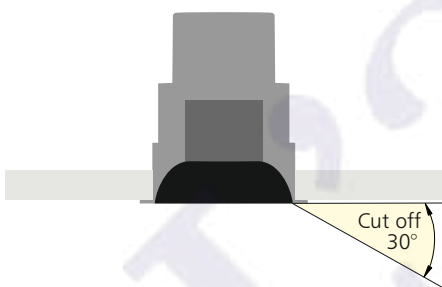


## Technical Data


|                   |                           |                  |             |
|-------------------|---------------------------|------------------|-------------|
| Mounting detail   | Ceiling - Recessed 1-25mm | Product weight   | 97gms       |
| Fixing detail     | Dual tension spring       | Safety class     | III         |
| Orientation       | Fixed                     | Insulation class | III         |
| IP rating         | IP20                      | LED current (mA) | 190mA       |
| Glow wire test    | 850°                      | Voltage          | AC230V      |
| Trim material     | Diecast alm.              | Forward voltage  | DC36V       |
| Heatsink material | Diecast alm.              | Driver           | CC - Remote |

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

### Interior Finish

- ☒ Matt Black

## Dimming Options



Constant Current Driver  
7w 190mA 220-240V  
Non Dimmable



Constant Current Driver  
7w 190mA 220-240V  
Triac Dimmable



Constant Current Driver  
7w 190mA 220-240V  
Analog 0-10V / 1-10V Dimmable



Constant Current Driver  
7w 190mA 220-240V  
Dali Dimmable



Constant Current Driver  
7w 190mA 220-240V  
Dali Tunable



Constant Current Driver  
7w 190mA 220-240V  
RF Tunable (operated with RF remote)