

iSkew Niche Midi - #1305



3W





233lm



3000K





24°



Photometric Data

Light source	LED - High Power	Light output ratio	69%
Power (W)	3W	Color rendering index (Ra)	>92
Delivered lumens	233lm	Color rendering index (R9)	>50
Source lumens	336lm	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	77.97lm/W	UGR	<19
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	31°	Light distribution	Direct - Symmetric

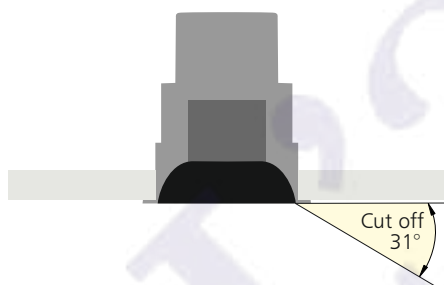

Technical Data

Mounting detail	Ceiling - Recessed 1-25mm	Product weight	41gms
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	600mA
Glow wire test	850°	Voltage	AC230V
Trim material	Diecast alm.	Forward voltage	DC3V
Heatsink material	Diecast alm.	Driver	CC - Remote

True Bin	FP per bin
1	96
2	97
3	94
4	93
5	94
6	97
7	98
8	99
9	97
10	95
11	93
12	93
13	90
14	90
15	92
16	91

A color vector graphic showing a color gradient from blue to red. A central white circle is overlaid on the gradient, which is divided into a grid of squares. The text "Color Vector Graphic" is visible in the top right corner.

☐ Matt White
☒ Matt Black



Constant Current Driver
3w 600mA 220-240V
Dali Dimmable