

## Brick - Trim 1x3 - #1260



6W






587lm




3000K



38°

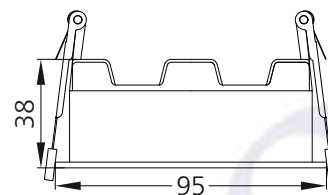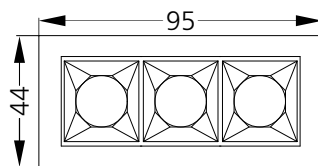
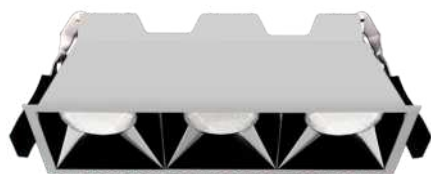


 84x37

### Photometric Data

|                        |                  |
|------------------------|------------------|
| Light source           | LED - High Power |
| Power (W)              | 6W               |
| Delivered lumens       | 587lm            |
| Source lumens          | 825lm            |
| Colour temperature (K) | 3000K            |
| Luminaire efficacy     | 97.86lm/W        |
| Beam angle             | 38°              |
| Cutoff angle           | 23°              |

|                            |                    |
|----------------------------|--------------------|
| Light output ratio         | 71%                |
| Color rendering index (Ra) | >92                |
| Color rendering index (R9) | >50                |
| Binning MacAdam            | <3 SDCM            |
| LED life                   | L90 B10 Tj75°C     |
| UGR                        | <19                |
| Operating temperature      | -20°C to +50°C     |
| Light distribution         | Direct - Symmetric |

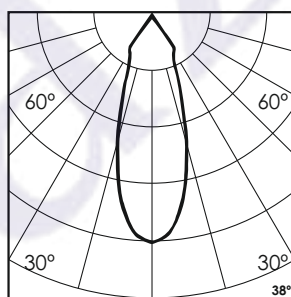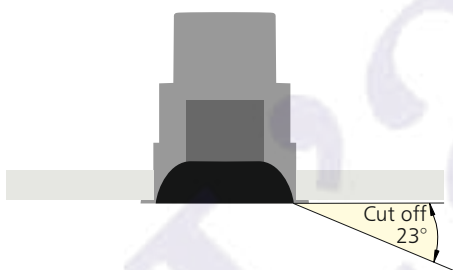

### Technical Data

|                   |                           |
|-------------------|---------------------------|
| Mounting detail   | Ceiling - Recessed 1-25mm |
| Fixing detail     | Dual tension spring       |
| Orientation       | Fixed                     |
| IP rating         | IP20                      |
| Glow wire test    | 850°                      |
| Trim material     | Diecast alm.              |
| Heatsink material | Diecast alm.              |

|                  |             |
|------------------|-------------|
| Product weight   | 186gms      |
| Safety class     | III         |
| Insulation class | III         |
| LED current (mA) | 500mA       |
| Voltage          | AC230V      |
| Forward voltage  | DC9V        |
| Driver           | CC - Remote |

## Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Trim Finish

- ☐ Matt White
- ☐ Matt Black
- ☐ Custom RAL Color

### Reflector Finish

- ☐ Specular
- ☐ Pearl Black

## Dimming Options



Constant Current Driver  
6w 500mA 220-240V  
Non Dimmable



Constant Current Driver  
6w 500mA 220-240V  
Triac Dimmable



Constant Current Driver  
6w 500mA 220-240V  
Analog 0-10V / 1-10V Dimmable



Constant Current Driver  
6w 500mA 220-240V  
Dali Dimmable



Constant Current Driver  
6w 500mA 220-240V  
Dali Tunable



Constant Current Driver  
6w 500mA 220-240V  
RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.