

Brick - Trim 1x10 - #1272



20W




2027lm



3000K





60°

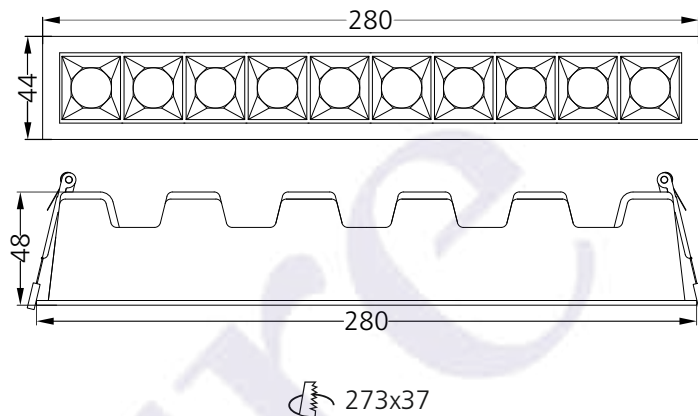

Photometric Data

Light source	LED - High Power	Light output ratio	73%
Power (W)	20W	Color rendering index (Ra)	> 92
Delivered lumens	2027lm	Color rendering index (R9)	> 50
Source lumens	2750lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	101.35lm/W	UGR	< 19
Beam angle	60°	Operating temperature	-20°C to +50°C
Cutoff angle	23°	Light distribution	Direct - Symmetric

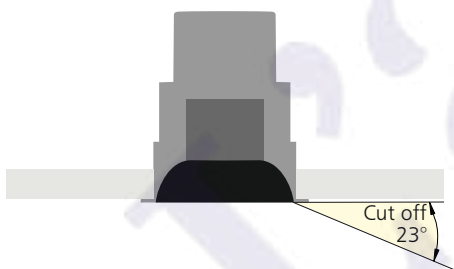

Technical Data

Mounting detail	Ceiling - Recessed 1-25mm	Product weight	620gms
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	500mA
Glow wire test	850°	Voltage	AC230V
Trim material	Diecast alm.	Forward voltage	DC30V
Heatsink material	Diecast alm.	Driver	CC - Remote

True Bin	FP per bin
1	96
2	97
3	94
4	95
5	97
6	97
7	98
8	97
9	97
10	95
11	93
12	93
13	90
14	90
15	92
16	91



A color vector graphic showing a circular shape with a black outline, centered on a background with a color gradient from blue to red. The background is divided into a grid of squares. The text "Color Vector Graphic" is visible in the top right corner.

- Specular
- Pearl Black



Constant Current Driver
20w 500mA 220-240V
RF Tunable (operated with RF remote)

Page 2/2