

# Aurele Glow L - #1420



54W




4445lm



4000K




Diffused

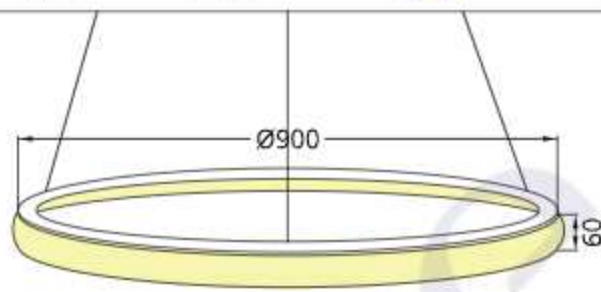

## Photometric Data

|                        |                 |                            |                   |
|------------------------|-----------------|----------------------------|-------------------|
| Light source           | LED - Low Power | Light output ratio         | 59%               |
| Power (W)              | 54W             | Color rendering index (Ra) | >92               |
| Delivered lumens       | 4445lm          | Color rendering index (R9) | >50               |
| Source lumens          | 7506lm          | Binning MacAdam            | <3 SDCM           |
| Colour temperature (K) | 4000K           | LED life                   | L90 B10 Tj75°C    |
| Luminaire efficacy     | 82.31lm/W       | UGR                        | <19               |
| Beam angle             | Diffused        | Operating temperature      | -20°C to +50°C    |
| Cutoff angle           | NA              | Light distribution         | Direct - Diffused |




## Technical Data


|                   |                   |                  |             |
|-------------------|-------------------|------------------|-------------|
| Mounting detail   | Ceiling - Pendant | Product weight   | 604gms      |
| Fixing detail     | Hanging Wire      | Safety class     | III         |
| Orientation       | Fixed             | Insulation class | III         |
| IP rating         | IP20              | Voltage          | AC230V      |
| Glow wire test    | 850°              | Forward voltage  | DC24V       |
| Trim material     | NA                | Driver           | CV - Remote |
| Heatsink material | Aluminium         |                  |             |

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

### Interior Finish

NA

## Dimming Options



Constant Voltage Driver  
DC24V  
Non Dimmable



Constant Voltage Driver  
DC24V  
Triac Dimmable



Constant Voltage Driver  
DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
DC24V  
Dali Dimmable



Constant Voltage Driver  
DC24V  
Dali Tunable



Constant Voltage Driver  
DC24V  
RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.