

Aurele Glow XL - #1421



72W




5890lm



4000K




Diffused

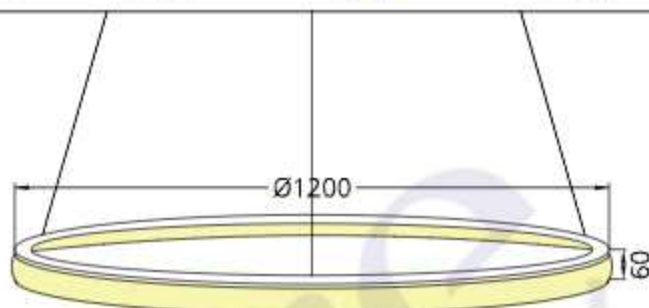

Photometric Data

| | | | |
|------------------------|-----------------|----------------------------|-------------------|
| Light source | LED - Low Power | Light output ratio | 58% |
| Power (W) | 72W | Color rendering index (Ra) | >92 |
| Delivered lumens | 5890lm | Color rendering index (R9) | >50 |
| Source lumens | 10008lm | Binning MacAdam | <3 SDCM |
| Colour temperature (K) | 4000K | LED life | L90 B10 Tj75°C |
| Luminaire efficacy | 81.80lm/W | UGR | <19 |
| Beam angle | Diffused | Operating temperature | -20°C to +50°C |
| Cutoff angle | NA | Light distribution | Direct - Diffused |

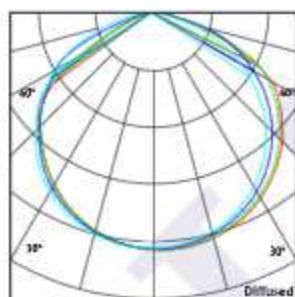


Technical Data


| | | | |
|-------------------|-------------------|------------------|-------------|
| Mounting detail | Ceiling - Pendant | Product weight | 906gms |
| Fixing detail | Hanging Wire | Safety class | III |
| Orientation | Fixed | Insulation class | III |
| IP rating | IP20 | Voltage | AC230V |
| Glow wire test | 850° | Forward voltage | DC24V |
| Trim material | NA | Driver | CV - Remote |
| Heatsink material | Aluminium | | |

Photometric Graphs


Hue Bin vs Rf Graph

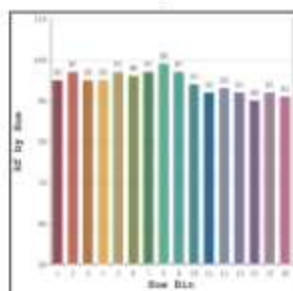


Color Vector Graph



Spectrum vs Wavelength Graph

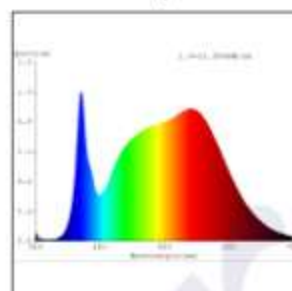

CIE Chromaticity Graph

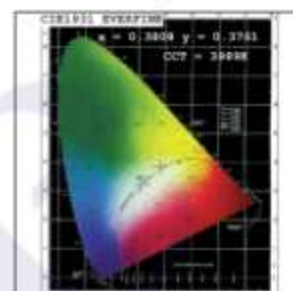

Finish Options

Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Interior Finish

NA

Dimming Options



Constant Voltage Driver
DC24V
Non Dimmable



Constant Voltage Driver
DC24V
Triac Dimmable



Constant Voltage Driver
DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
DC24V
Dali Dimmable



Constant Voltage Driver
DC24V
Dali Tunable



Constant Voltage Driver
DC24V
RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.