

Aurele Outwards XL - #1417



72W




5580lm



2700K




Diffused

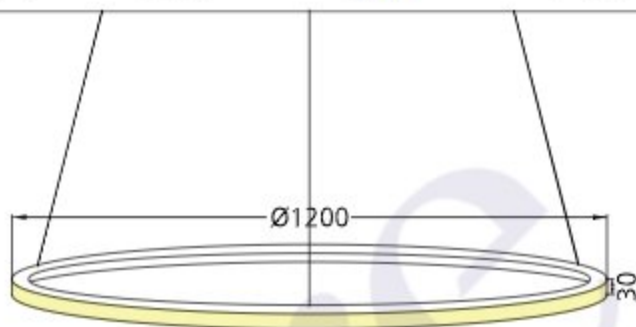

Photometric Data

Light source	LED - Low Power
Power (W)	72W
Delivered lumens	5580lm
Source lumens	9072lm
Colour temperature (K)	2700K
Luminaire efficacy	77.5lm/W
Beam angle	Diffused
Cutoff angle	NA

Light output ratio	61%
Color rendering index (Ra)	>92
Color rendering index (R9)	>50
Binning MacAdam	<3 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Diffused

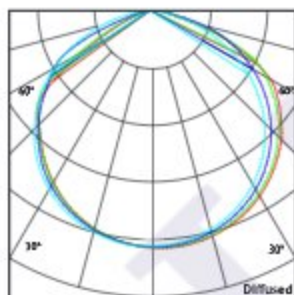


Technical Data

Mounting detail	Ceiling - Pendant
Fixing detail	Hanging Wire
Orientation	Fixed
IP rating	IP20
Glow wire test	850°
Trim material	Aluminium
Heatsink material	Aluminium


Product weight	906gms
Safety class	III
Insulation class	III
Voltage	AC230V
Forward voltage	DC24V
Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph

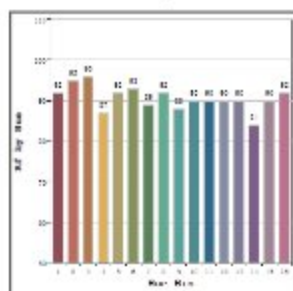


Color Vector Graph

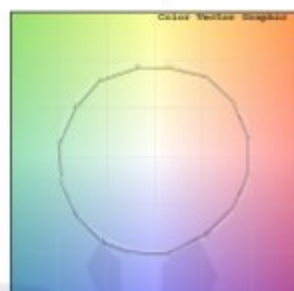

Spectrum vs Wavelength Graph

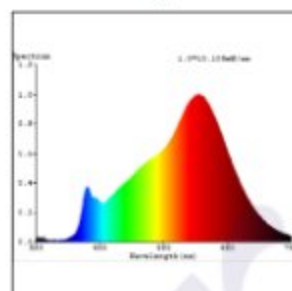

CIE Chromaticity Graph

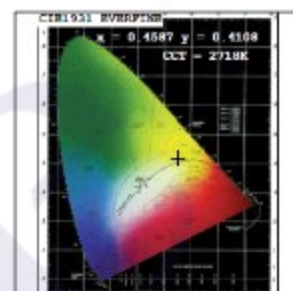

Finish Options

Trim Finish

- ☐ Matt White
- ☐ Matt Black
- ☒ Custom RAL Color

Interior Finish

NA

Dimming Options



Constant Voltage Driver
DC24V
Non Dimmable



Constant Voltage Driver
DC24V
Triac Dimmable



Constant Voltage Driver
DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
DC24V
Dali Dimmable



Constant Voltage Driver
DC24V
Dali Tunable



Constant Voltage Driver
DC24V
RF Tunable (operated with RF remote)

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.