

Aurele Ring Surface XL - #1397



72W




6273lm



3000K




Diffused

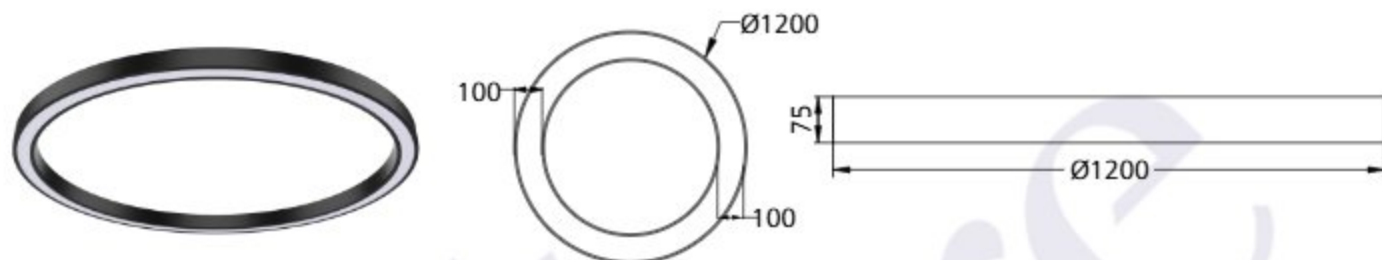

Photometric Data

Light source	LED - Mid Power	Light output ratio	66%
Power (W)	72W	Color rendering index (Ra)	> 92
Delivered lumens	6273lm	Color rendering index (R9)	> 50
Source lumens	9432lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.12lm/W	UGR	< 19
Beam angle	Diffused	Operating temperature	-20°C to + 50°C
Cutoff angle	NA	Light distribution	Direct - Diffused



Technical Data

Mounting detail	Ceiling - Surface	Product weight	2500gms
Fixing detail	Mounting with Screw	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	2000mA
Glow wire test	850°	Voltage	AC230V
Trim material	NA	Forward voltage	DC60V
Heatsink material	Aluminium	Driver	CC - Remote

Tax. Div.	N of Tax
1	96
2	97
3	96
4	92
5	97
6	93
7	97
8	90
9	97
10	92
11	93
12	93
13	93
14	90
15	97
16	95

☐ Matt White

☒ Matt Black



Constant Current Driver
72w 2000mA 220-240V
Dali Dimmable