

# Top Bend S - IP67 - #2192



12W/M





930lm/m



2700K




Diffused

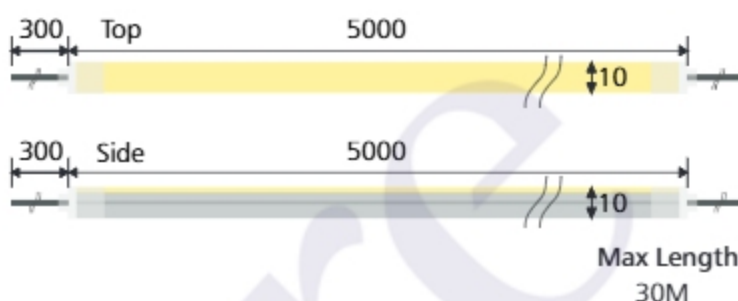

## Photometric Data

Light source	LED - Low Power
Power (W)	12W/M
Delivered lumens	930lm/m
Source lumens	1512lm/m
Colour temperature (K)	2700K
Luminaire efficacy	77.5lm/W
Beam angle	Diffused

Light output ratio	61%
Color rendering index (Ra)	> 92
Color rendering index (R9)	> 50
Binning MacAdam	< 3 SDCM
LED life	L90 B10 Tj75°C
Operating temperature	-20°C to + 50°C
Light distribution	Direct - Diffused

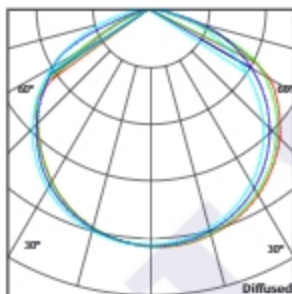


## Technical Data

Mounting detail	Profile or Clamp Mounted
Fixing detail	Screw Mounting
Orientation	Fixed
IP rating	IP67
Glow wire test	850°


Safety class	III
Insulation class	III
Driver Input Voltage	AC230V
Flexum voltage	DC48V
Driver	CV - Remote

## Photometric Graphs


Hue Bin vs Rf Graph

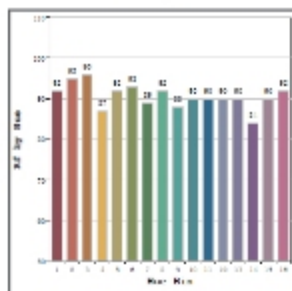


Color Vector Graph

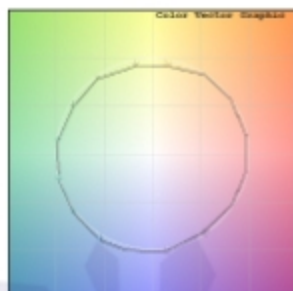

Spectrum vs Wavelength Graph

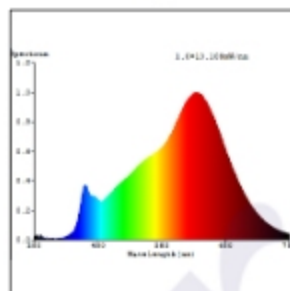


CIE Chromaticity Graph

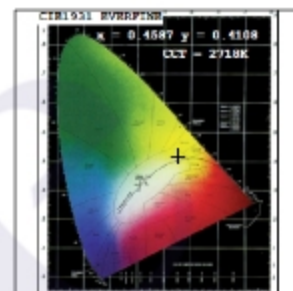

## Accessories Options



Top Bend  
Radius 300mm



Front  
Cable Entry



Side  
Cable Entry




Bottom  
Cable Entry



Mounting  
Chain



Mounting  
Clamp



Mounting  
Profile

## Dimming Options



Constant Voltage Driver  
75w DC48V  
Non Dimmable




Constant Voltage Driver  
75w DC48V  
Triac Dimmable



Constant Voltage Driver  
75w DC48V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC48V  
Dali Dimmable

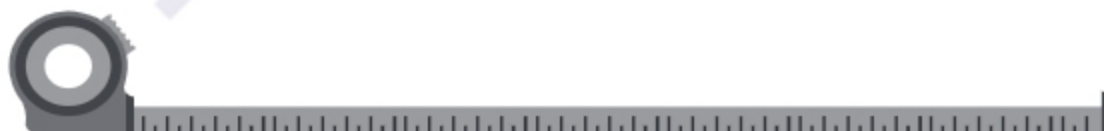

L'azure Exclusive 30 Meter Single length.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.