

Hypogean Fix R12 - #3041



24W





1085lm



Red





Asymmetric



Photometric Data

Light source	LED - High Power	Beam angle	Asymmetric
Power (W)	24W	Light output ratio	66%
Delivered lumens	1085lm	LED life	L90 B10 Tj75°C
Source lumens	1632lm	UGR	<19
Colour temperature (K)	Red	Operating temperature	-20°C to +50°C
Luminaire efficacy	45.23lm/W	Light distribution	Asymmetric

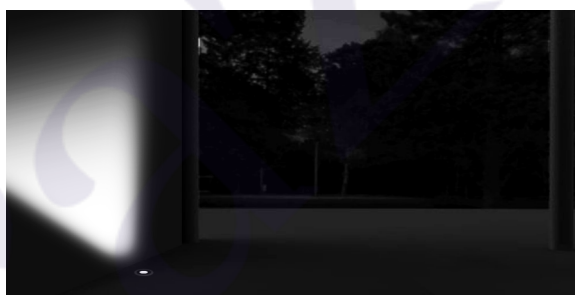

Technical Data

Mounting detail	Inground Light	Glow wire test	850°
Fixing detail	Backbox	Product weight	1582gms
Orientation	Fixed	Safety class	III
IP rating	IP67	Insulation class	III
IK rating	IK08	Voltage	DC24V
Heatsink material	Diecast alm.	Driver	Remote - DC24V
Ring material	SS		

Finish Options

Trim Finish

- ☐ SS
- ☒ Custom RAL Color

Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver