

# Hypogean Tilt RA-3 - #3042



9W





325lm



Blue





10°

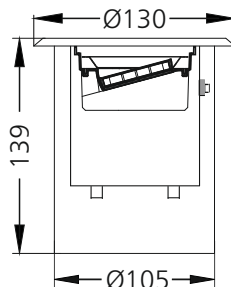

## Photometric Data

Light source	LED - High Power	Beam angle	10°
Power (W)	9W	Light output ratio	63%
Delivered lumens	325lm	LED life	L90 B10 Tj75°C
Source lumens	513lm	UGR	<19
Colour temperature (K)	Blue	Operating temperature	-20°C to +50°C
Luminaire efficacy	36.11lm/W	Light distribution	Direct - Symmetric

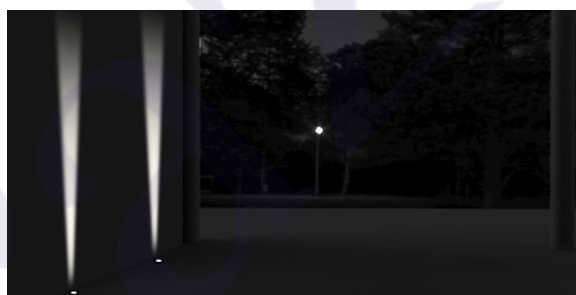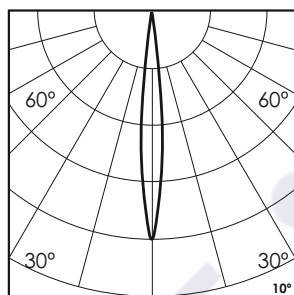



## Technical Data

Mounting detail	Inground Light	Glow wire test	850°
Fixing detail	Backbox	Product weight	1121gms
Orientation	Adjustable	Safety class	III
IP rating	IP67	Insulation class	III
IK rating	IK08	Voltage	DC24V
Heatsink material	Diecast alm.	Driver	Remote - DC24V
Ring material	SS		

## Finish Options

### Trim Finish

-  SS
-  Custom RAL Color

## Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver