

Incis - Tribeca - #2219



36W





3852lm



2700K




24°

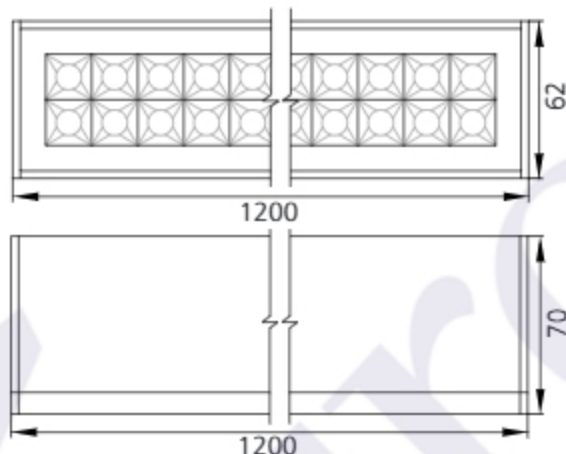

Photometric Data

Light source	LED - High Power	Light output ratio	84%
Power (W)	36W	Color rendering index (Ra)	> 92
Delivered lumens	3852lm	Color rendering index (R9)	> 50
Source lumens	4536lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	107lm/W	UGR	< 19
Beam angle	24°	Operating temperature	-20°C to + 50°C
Cutoff angle	27°	Light distribution	Direct - Symmetric




Technical Data


Mounting detail	Pendant	Product weight	888gms
Fixing detail	Suspension Wire	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	NA	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	In-built

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Matt Black

Dimming Options



Non Dimmable
In-built Driver



Triac Dimmable
In-built Driver



Analog 0-10V / 1-10V Dimmable
In-built Driver



Dali Dimmable
In-built Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.