

# Incis - Tribeca - #2219



36W





3936lm



3000K




24°

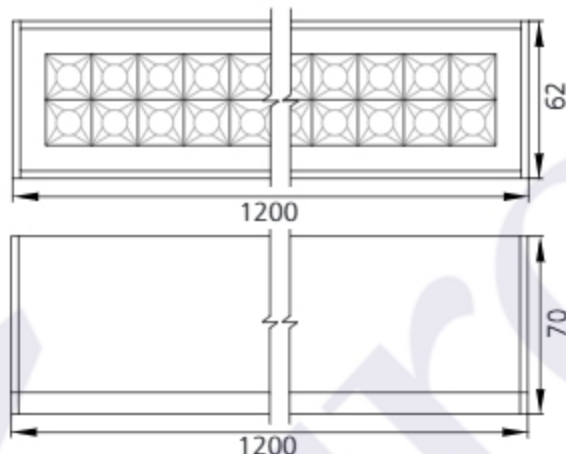

## Photometric Data

|                        |                  |                            |                    |
|------------------------|------------------|----------------------------|--------------------|
| Light source           | LED - High Power | Light output ratio         | 83%                |
| Power (W)              | 36W              | Color rendering index (Ra) | > 92               |
| Delivered lumens       | 3936lm           | Color rendering index (R9) | > 50               |
| Source lumens          | 4716lm           | Binning MacAdam            | < 3 SDCM           |
| Colour temperature (K) | 3000K            | LED life                   | L90 B10 Tj75°C     |
| Luminaire efficacy     | 109lm/W          | UGR                        | < 19               |
| Beam angle             | 24°              | Operating temperature      | -20°C to + 50°C    |
| Cutoff angle           | 27°              | Light distribution         | Direct - Symmetric |




## Technical Data


|                   |                    |                  |                  |
|-------------------|--------------------|------------------|------------------|
| Mounting detail   | Pendant            | Product weight   | 888gms           |
| Fixing detail     | Suspension Wire    | Safety class     | III              |
| Orientation       | Fixed              | Insulation class | III              |
| IP rating         | IP20               | LED current (mA) | Depend on length |
| Glow wire test    | 850°               | Voltage          | AC230V           |
| Trim material     | NA                 | Forward voltage  | DC24V            |
| Heatsink material | Aluminum Extrusion | Driver           | In-built         |

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

### Reflector Finish

- ☒ Matt Black

## Dimming Options



Non Dimmable  
In-built Driver



Triac Dimmable  
In-built Driver



Analog 0-10V / 1-10V Dimmable  
In-built Driver



Dali Dimmable  
In-built Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.