

Incis - Tribeca - #2219



72W





7704lm



2700K




24°

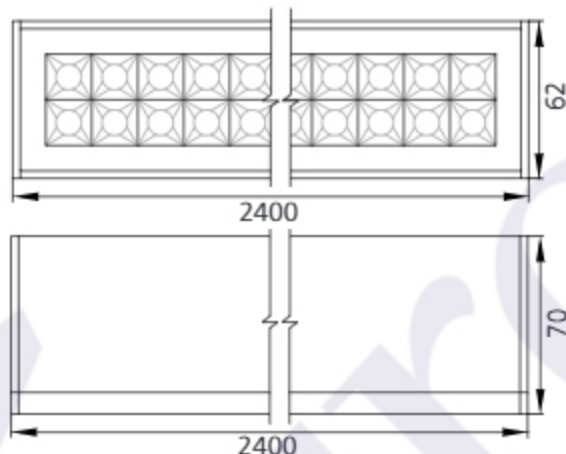

Photometric Data

Light source	LED - High Power
Power (W)	72W
Delivered lumens	7704lm
Source lumens	9072lm
Colour temperature (K)	2700K
Luminaire efficacy	107lm/W
Beam angle	24°
Cutoff angle	27°

Light output ratio	84%
Color rendering index (Ra)	> 92
Color rendering index (R9)	> 50
Binning MacAdam	< 3 SDCM
LED life	L90 B10 Tj75°C
UGR	< 19
Operating temperature	-20°C to + 50°C
Light distribution	Direct - Symmetric




Technical Data

Mounting detail	Pendant
Fixing detail	Suspension Wire
Orientation	Fixed
IP rating	IP20
Glow wire test	850°
Trim material	NA
Heatsink material	Aluminum Extrusion


Product weight	1776gms
Safety class	III
Insulation class	III
LED current (mA)	Depend on length
Voltage	AC230V
Forward voltage	DC24V
Driver	In-built

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Matt Black

Dimming Options



Non Dimmable
In-built Driver



Triac Dimmable
In-built Driver



Analog 0-10V / 1-10V Dimmable
In-built Driver



Dali Dimmable
In-built Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.