


Joule Invi Magnetic - Track

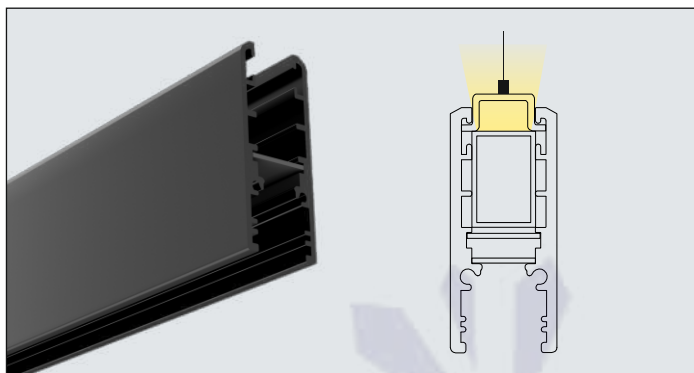

Invi Pendant Track
#2071

- Shows an isometric render & 2D view of Joule Invi Pendant Up lighting. Joule Invi Pendant Track can be selected considering the surface or pendant installation.
- Up-Lighting Option Available on demand 'Flexum Top S - IP65 #2183' needs to be ordered separately
- Available accessories that is needed for installation of Joule Invi Pendant Track are mentioned below. Accessories needs to be ordered separately

Accessories



Flat Corner



Inner Corner



End Cap



Connectors



I Jointer Module




Mounting Clamp



Input Module



Suspension Kit

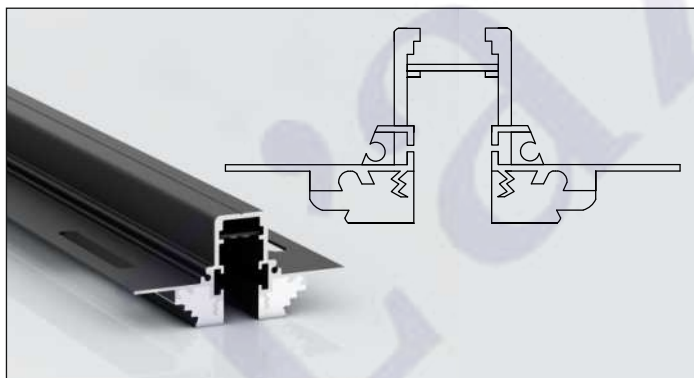

Invi Recessed Track
#2072

- Shows an isometric render & 2D view of a Joule Invi Recessed Track that can be selected considering the recessed installation.
- Preset Gypsum is fixed on Joule Invi Recessed Track to ensure seamless and crack-free installation.
- Available accessories that is needed for installation of Joule Invi Recessed Track are mentioned below. Accessories needs to be ordered separately.

Accessories



Flat Corner



Inner Corner



End Cap



Connectors



"L" Male Female
Connector



Input Module



I Jointer Module

Invi L - Diffused 578 - #2230



18W





1414lm



3000K




Diffused



Photometric Data

Light source	LED - Mid Power
Power (W)	18W
Delivered lumens	1414lm
Source lumens	2358lm
Colour temperature (K)	3000K
Luminaire efficacy	78.56lm/W
Beam angle	Diffused
Cutoff angle	NA

Light output ratio	59%
Color rendering index (Ra)	>92
Color rendering index (R9)	>50
Binning MacAdam	<3 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Diffused




Technical Data

Mounting detail	Recessed
Fixing detail	Dual tension spring
Orientation	Fixed
IP rating	IP20
Glow wire test	850°
Trim material	Aluminium
Heatsink material	Aluminium Extrusion


Product weight	175gms
Safety class	III
Insulation class	III
Voltage	AC230V
Forward voltage	DC24V
Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- Matt Black
- Custom RAL Color

Interior Finish

- Matt Black
- Matt Gold

Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

Dimming Options



Non Dimmable Remote Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry. Due to which the data mentioned in the data sheet is subject to change without prior notice.