

Kosmos 15 - #2201



15W




1405lm



2700K




10x65°

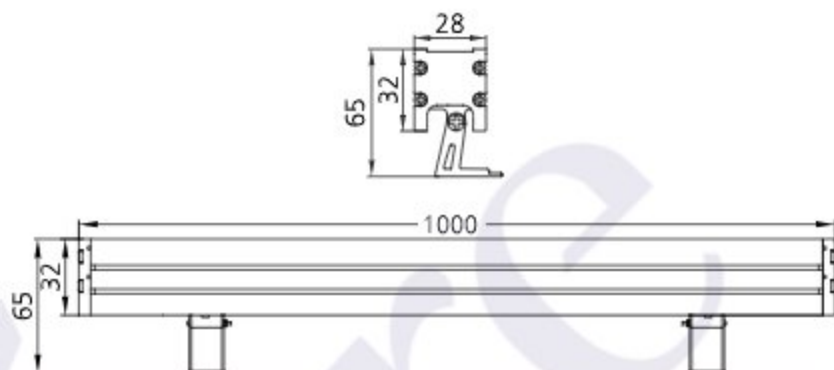

Photometric Data

Light source	LED - Mid Power	Light output ratio	70%
Power (W)	15W	Color rendering index (Ra)	>92
Delivered lumens	1405lm	Color rendering index (R9)	>50
Source lumens	1987lm	Binning MacAdam	<2 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	93.66lm/W	UGR	<19
Beam angle	10x65°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Grazer




Technical Data


Mounting detail	Surface Mounted	Glow wire test	850°
Fixing detail	Mounting Clamp	Product weight	1010gms Per 1000MM
Orientation	Fixed / Adjustable	Safety class	III
IP rating	IP65	Insulation class	III
IK rating	IK05	Driver Input Voltage	AC230V
Trim material	NA	Fixture voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options


Body Finish

- Matt Grey
- Custom RAL Color

Length

- 500MM
- 1000MM

Clamp Options



Fix Clamp




Adj. Clamp

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.