

Kosmos 15 - #2201



15W




1105lm



RGB




10x65°

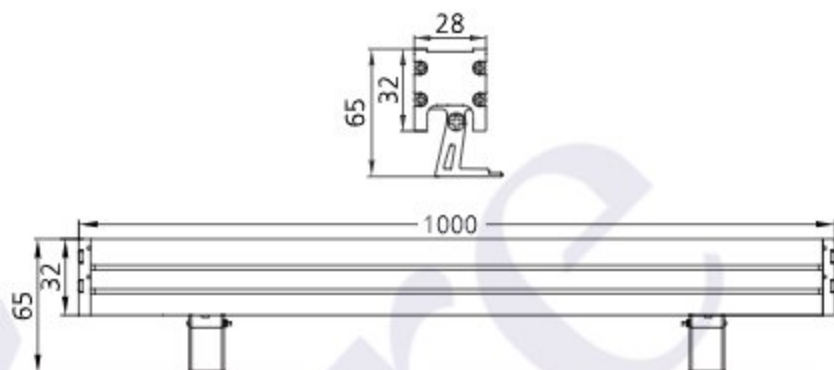

Photometric Data

Light source	LED - Mid Power	Light output ratio	81%
Power (W)	15W	Color rendering index (Ra)	NA
Delivered lumens	1105lm	Color rendering index (R9)	NA
Source lumens	1350lm	Binning MacAdam	<2 SDCM
Colour temperature (K)	RGB	LED life	L90 B10 Tj75°C
Luminaire efficacy	73.66lm/W	UGR	<19
Beam angle	10x65°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Grazer



Technical Data

Mounting detail	Surface Mounted	Glow wire test	850°
Fixing detail	Mounting Clamp	Product weight	1010gms Per 1000MM
Orientation	Fixed / Adjustable	Safety class	III
IP rating	IP65	Insulation class	III
IK rating	IK05	Driver Input Voltage	AC230V
Trim material	NA	Fixture voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Finish Options


Body Finish

-  Matt Grey
-  Custom RAL Color

Length

- 500MM
- 1000MM

Clamp Options



Fix Clamp



Adj. Clamp

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver