

Kosmos - Flexi Cove - #2215



18W/M




1701lm/m



4000K





30°

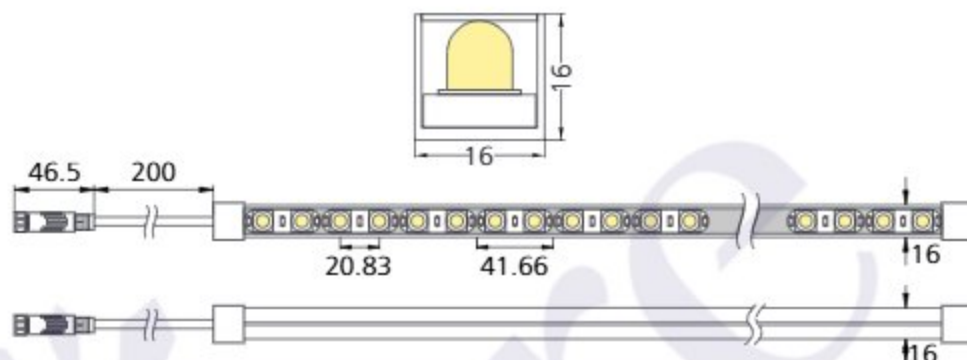

Photometric Data

Light source	LED - High Power	Light output ratio	66%
Power (W)	18W/M	Color rendering index (Ra)	> 92
Delivered lumens	1701lm/m	Color rendering index (R9)	> 50
Source lumens	2565lm/m	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	94.5lm/W	UGR	< 19
Beam angle	30°	Operating temperature	-20°C to + 50°C
Cutoff angle	NA	Light distribution	Grazer

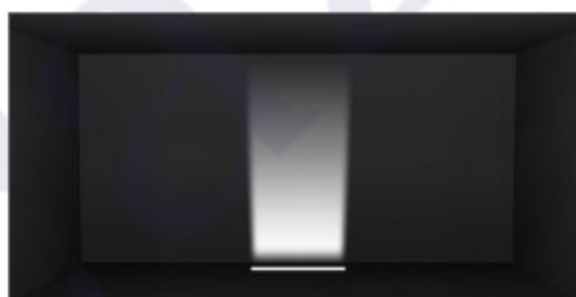


Technical Data


Mounting detail	Surface Mounted	Glow wire test	850°
Fixing detail	Mounting Clamp	Safety class	III
Orientation	Top & Side Bendable	Insulation class	III
IP rating	IP67	Driver Input Voltage	AC230V
Trim material	NA	Fixture voltage	DC24V
Heatsink material	Silicone	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color


Length

5000MM

Accessories Options




Top Bend
Radius 300mm
Radius 300mm



Front
Cable Entry



Side
Cable Entry



Bottom
Cable Entry



Mounting
Chain



Mounting
Clamp



Mounting
Profile

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.