

# Marcopia Round 3 - #3014



12W





550lm



Red





10°



## Photometric Data

|                        |             |                       |                    |
|------------------------|-------------|-----------------------|--------------------|
| Light source           | LED - Array | Beam angle            | 10°                |
| Power (W)              | 12W         | Light output ratio    | 67%                |
| Delivered lumens       | 550lm       | LED life              | L90 B10 Tj75°C     |
| Source lumens          | 816lm       | UGR                   | <19                |
| Colour temperature (K) | Red         | Operating temperature | -20°C to +50°C     |
| Luminaire efficacy     | 45.83lm/W   | Light distribution    | Direct - Symmetric |

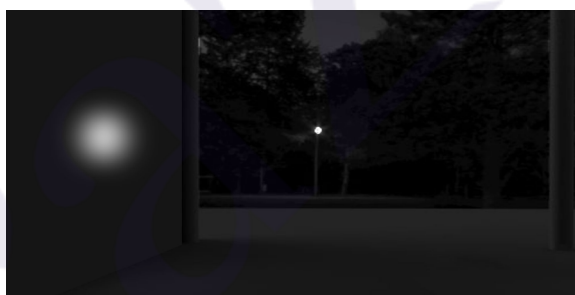

## Technical Data

|                 |                                               |                   |                |
|-----------------|-----------------------------------------------|-------------------|----------------|
| Mounting detail | Surface Uplighter                             | Heatsink material | Diecast alm.   |
| Fixing detail   | Cowl / Spike / Tree Strap /<br>Mounting Plate | Product weight    | 528gms         |
| Orientation     | Adjustable                                    | Safety class      | III            |
| IP rating       | IP65                                          | Insulation class  | III            |
| IK rating       | IK05                                          | Voltage           | DC24V          |
| Glow wire test  | 850°                                          | Driver            | Remote - DC24V |

## Finish Options

### Body Finish

- Matt Grey
- Matt Black
- Custom RAL Color

## Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

## Accessories Options



Cowl



Spike



Tree Strap

Above accessories can be added to the fixture and need to be ordered as a separate accessory

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver