


Numinous - Profile M



Recessed M
#2120

- Choose Profile - Numinous Recessed M #2120
- Choose the desired Jointer 'I' or 'L' depending on the requirement. Note :- The maximum available straight length is 3000mm
- Choose the desired modules i.e Brick - 133mm, Circle - 133mm, Wash - 133mm, Diffused - 150mm or Blank. The overall length of the Numinous fixture is dependent on the no of modules selected. Note :- All of this modules can be used besides one another. Blank Module can be used where no desired lighting is required to achieved seamless installation.

Jointer



'I' Jointer




'L' Jointer




Pendant M
#2121

- Choose Profile - Numinous Pendant M #2121
- Choose the desired Jointer 'I' or 'L' depending on the requirement. Note :- The maximum available straight length is 3000mm
- Choose the desired modules i.e Brick - 133mm, Circle - 133mm, Wash - 133mm, Diffused - 150mm or Blank. The overall length of the Numinous fixture is dependent on the no of modules selected. Note :- All of this modules can be used besides one another. Blank Module can be used where no desired lighting is required to achieved seamless installation.

Jointer



'I' Jointer



'L' Jointer

Connection Module



L - Module
300x33x34 - 2



+ - Module
300x33x34 - 4



X - Module
300x33x34 - 4



M - Blank

M - Wash 133

M - Circle 133

M - Diffused 150

M - Brick 133

M - Blank

Module M - Wash 133 - #2126



10W




785lm



2700K




Wallwash

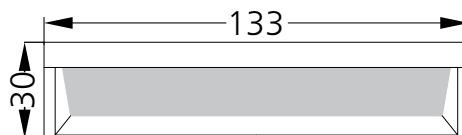

Photometric Data

Light source	LED - High Power	Light output ratio	59%
Power (W)	10W	Color rendering index (Ra)	>92
Delivered lumens	785lm	Color rendering index (R9)	>50
Source lumens	1325lm	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	78.5lm/W	UGR	<16
Beam angle	Wallwash	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Asymmetric




Technical Data


Mounting detail	Recessed / Pendant	Product weight	102gms Per 133MM
Fixing detail	Spring / Suspension Wire	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V / DC24V
Trim material	Aluminium	Forward voltage	DC36V
Heatsink material	Aluminium Extrusion	Driver	Remote - Recessed In-built - Pendant

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Non Dimmable
Remote / In-built Driver



Triac Dimmable
Remote / In-built Driver



Analog 0-10V / 1-10V Dimmable
Remote / In-built Driver



Dali Dimmable
Remote / In-built Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.