

# Recessed M - Brick - #2134



24W





2203lm



2700K





24°



## Photometric Data

|                        |                  |                            |                    |
|------------------------|------------------|----------------------------|--------------------|
| Light source           | LED - High Power | Light output ratio         | 69%                |
| Power (W)              | 24W              | Color rendering index (Ra) | > 92               |
| Delivered lumens       | 2203lm           | Color rendering index (R9) | > 50               |
| Source lumens          | 3180lm           | Binning MacAdam            | < 3 SDCM           |
| Colour temperature (K) | 2700K            | LED life                   | L90 B10 Tj75°C     |
| Luminaire efficacy     | 91.81lm/W        | UGR                        | < 16               |
| Beam angle             | 24°              | Operating temperature      | -20°C to +50°C     |
| Cutoff angle           | NA               | Light distribution         | Direct - Symmetric |

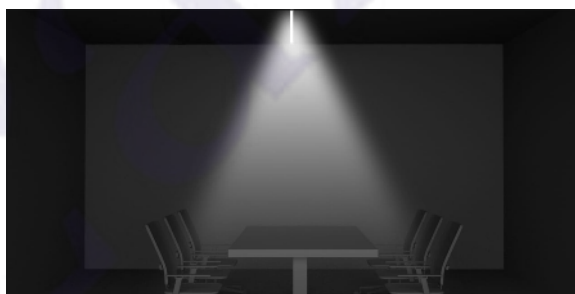

## Technical Data

|                   |                     |                  |                   |
|-------------------|---------------------|------------------|-------------------|
| Mounting detail   | Recessed            | Product weight   | 925gms Per 1196MM |
| Fixing detail     | Dual tension spring | Safety class     | III               |
| Orientation       | Fixed               | Insulation class | III               |
| IP rating         | IP20                | LED current (mA) | Depend on length  |
| Glow wire test    | 850°                | Voltage          | AC230V            |
| Trim material     | Aluminum            | Forward voltage  | DC24V             |
| Heatsink material | Aluminum Extrusion  | Driver           | CV - Remote       |

## Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

### Reflector Finish

- ☒ Specular
- ☐ Pearl Black

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

## Note :-

- Although the maximum capacity of the Modules is 10W/133mm for Numinous M, the maximum capacity that the profile in which the modules are placed is 20W/m for Numinous M profile.
- The standard lengths for the Numinous Recessed M fixtures is 1196mm including the endcaps. Each fixture of length 1196mm contains 9 pieces of modules which are placed side by side in the Numinous Recessed M profile. Kindly note - there is no gap in between the modules.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.