

Recessed M - Circle - #2135



24W





2148lm



2700K





15°



Photometric Data

Light source	LED - High Power	Light output ratio	67%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2148lm	Color rendering index (R9)	> 50
Source lumens	3180lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	89.5lm/W	UGR	< 16
Beam angle	15°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

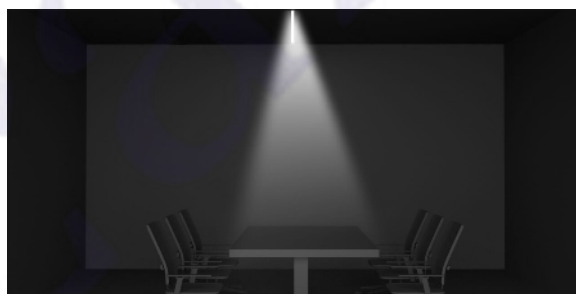

Technical Data

Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



24W





2203lm



2700K





24°



Photometric Data

Light source	LED - High Power	Light output ratio	69%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2203lm	Color rendering index (R9)	> 50
Source lumens	3180lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	91.81lm/W	UGR	< 16
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

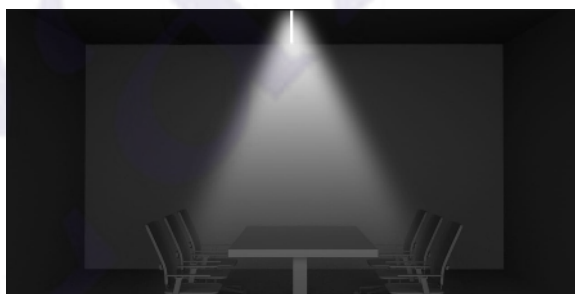

Technical Data

Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



24W





2236lm



2700K





38°



Photometric Data

Light source	LED - High Power	Light output ratio	70%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2236lm	Color rendering index (R9)	> 50
Source lumens	3180lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	93.2lm/W	UGR	< 16
Beam angle	38°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

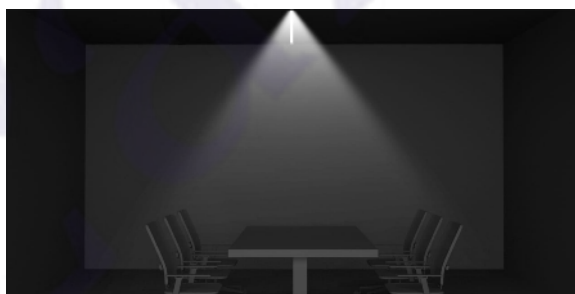


Technical Data


Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Note :-

- Although the maximum capacity of the Modules is 10W/133mm for Numinous M, the maximum capacity that the profile in which the modules are placed is 20W/m for Numinous M profile.
- The standard lengths for the Numinous Recessed M fixtures is 1196mm including the endcaps. Each fixture of length 1196mm contains 9 pieces of modules which are placed side by side in the Numinous Recessed M profile. Kindly note - there is no gap in between the modules.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Recessed M - Circle - #2135



24W





2196lm



3000K





15°



Photometric Data

Light source	LED - High Power	Light output ratio	66%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2196lm	Color rendering index (R9)	> 50
Source lumens	3300lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	91.5lm/W	UGR	< 16
Beam angle	15°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

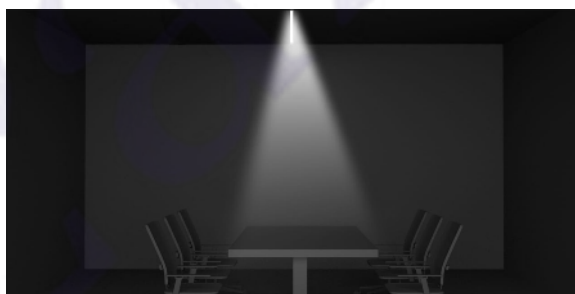

Technical Data

Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



24W





2251lm



3000K





24°



Photometric Data

Light source	LED - High Power	Light output ratio	68%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2251lm	Color rendering index (R9)	> 50
Source lumens	3300lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	93.81lm/W	UGR	< 16
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

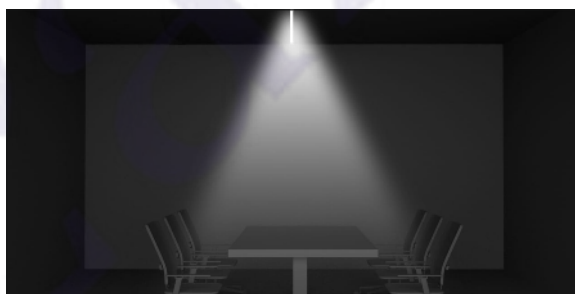

Technical Data

Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



24W





2284lm



3000K





38°



Photometric Data

Light source	LED - High Power	Light output ratio	69%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2284lm	Color rendering index (R9)	> 50
Source lumens	3300lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	95.2lm/W	UGR	< 16
Beam angle	38°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

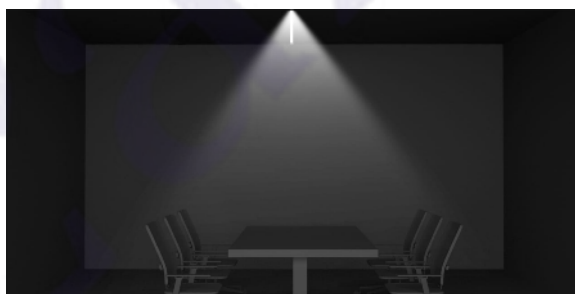


Technical Data


Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Note :-

- Although the maximum capacity of the Modules is 10W/133mm for Numinous M, the maximum capacity that the profile in which the modules are placed is 20W/m for Numinous M profile.
- The standard lengths for the Numinous Recessed M fixtures is 1196mm including the endcaps. Each fixture of length 1196mm contains 9 pieces of modules which are placed side by side in the Numinous Recessed M profile. Kindly note - there is no gap in between the modules.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Recessed M - Circle - #2135



24W





2268lm



4000K





15°



Photometric Data

Light source	LED - High Power	Light output ratio	66%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2268lm	Color rendering index (R9)	> 50
Source lumens	3420lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	94.5lm/W	UGR	< 16
Beam angle	15°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

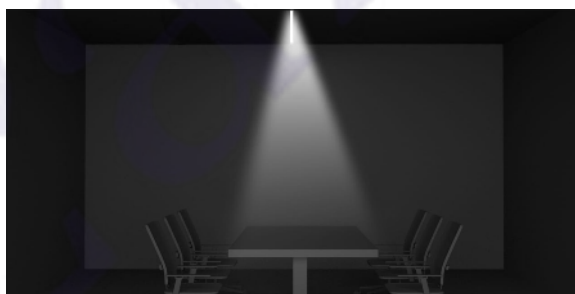

Technical Data

Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



24W





2323lm



4000K





24°



Photometric Data

Light source	LED - High Power	Light output ratio	67%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2323lm	Color rendering index (R9)	> 50
Source lumens	3420lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	96.81lm/W	UGR	< 16
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

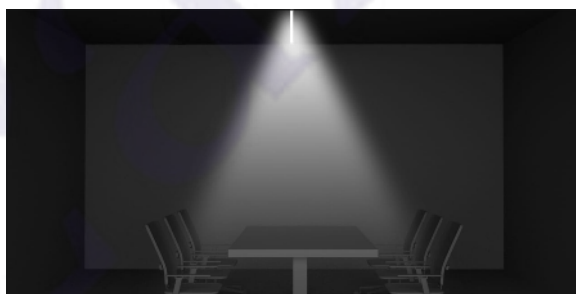

Technical Data

Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



24W





2356lm



4000K





38°



Photometric Data

Light source	LED - High Power	Light output ratio	68%
Power (W)	24W	Color rendering index (Ra)	> 92
Delivered lumens	2356lm	Color rendering index (R9)	> 50
Source lumens	3420lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	98.2lm/W	UGR	< 16
Beam angle	38°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

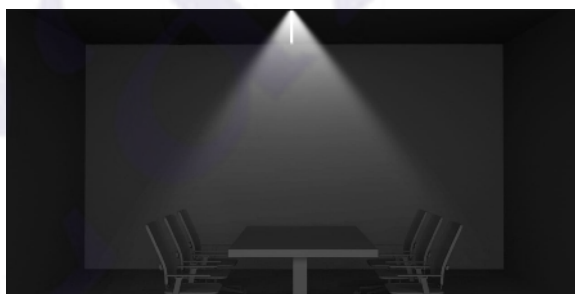


Technical Data


Mounting detail	Recessed	Product weight	925gms Per 1196MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Note :-

- Although the maximum capacity of the Modules is 10W/133mm for Numinous M, the maximum capacity that the profile in which the modules are placed is 20W/m for Numinous M profile.
- The standard lengths for the Numinous Recessed M fixtures is 1196mm including the endcaps. Each fixture of length 1196mm contains 9 pieces of modules which are placed side by side in the Numinous Recessed M profile. Kindly note - there is no gap in between the modules.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Recessed M - Circle - #2135



48W





4296lm



2700K





15°



Photometric Data

Light source	LED - High Power	Light output ratio	67%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4296lm	Color rendering index (R9)	> 50
Source lumens	6360lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	89.5lm/W	UGR	< 16
Beam angle	15°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

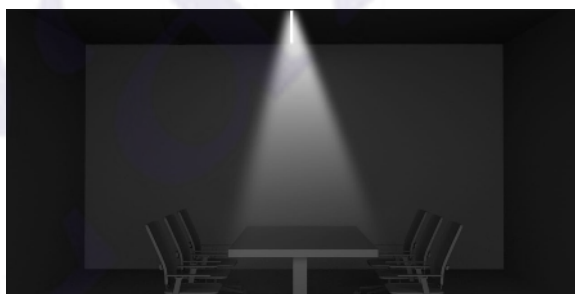

Technical Data

Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



48W





4406lm



2700K





24°



Photometric Data

Light source	LED - High Power	Light output ratio	69%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4406lm	Color rendering index (R9)	> 50
Source lumens	6360lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	91.81lm/W	UGR	< 16
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

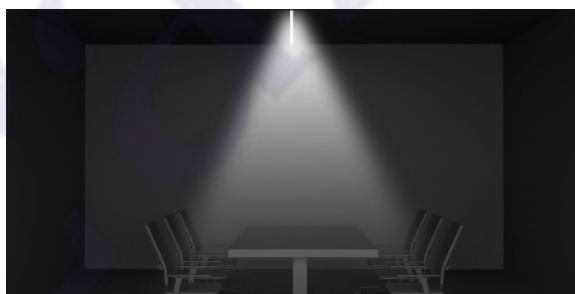

Technical Data

Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



48W





4473lm



2700K





38°



Photometric Data

Light source	LED - High Power	Light output ratio	70%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4473lm	Color rendering index (R9)	> 50
Source lumens	6360lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	93.2lm/W	UGR	< 16
Beam angle	38°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

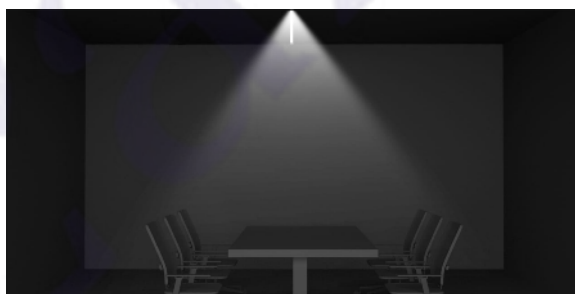


Technical Data


Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Note :-

- Although the maximum capacity of the Modules is 10W/133mm for Numinous M, the maximum capacity that the profile in which the modules are placed is 20W/m for Numinous M profile.
- The standard lengths for the Numinous Recessed M fixtures is 2389mm including the endcaps. Each fixture of length 2389mm contains 18 pieces of modules which are placed side by side in the Numinous Recessed M Profile. Kindly note - there is no gap in between the modules.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Recessed M - Circle - #2135



48W





4392lm



3000K





15°



Photometric Data

Light source	LED - High Power	Light output ratio	66%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4392lm	Color rendering index (R9)	> 50
Source lumens	6600lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	91.5lm/W	UGR	< 16
Beam angle	15°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

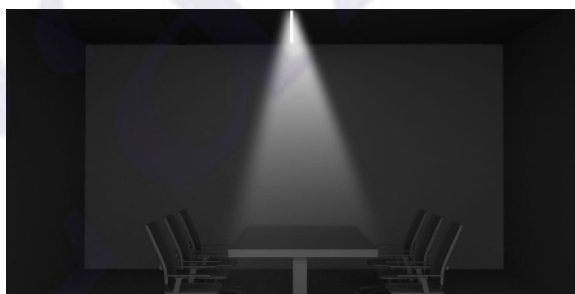

Technical Data

Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



48W





4502lm



3000K





24°



Photometric Data

Light source	LED - High Power	Light output ratio	68%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4502lm	Color rendering index (R9)	> 50
Source lumens	6600lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	93.81lm/W	UGR	< 16
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

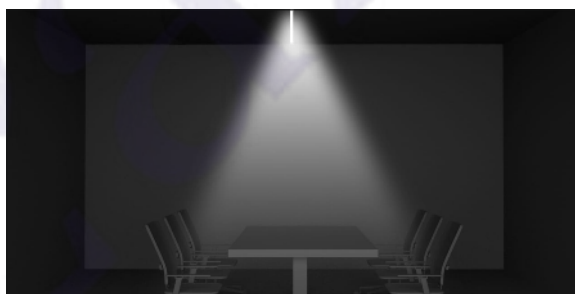

Technical Data

Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



48W





4569lm



3000K





38°



Photometric Data

Light source	LED - High Power	Light output ratio	69%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4569lm	Color rendering index (R9)	> 50
Source lumens	6600lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	95.2lm/W	UGR	< 16
Beam angle	38°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

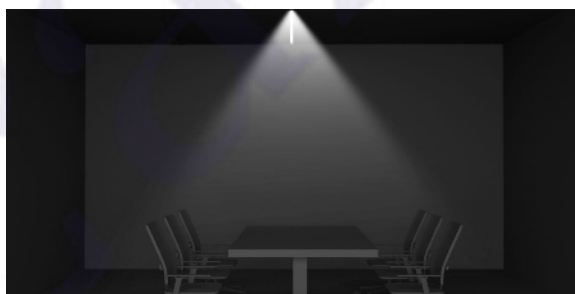


Technical Data


Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Note :-

- Although the maximum capacity of the Modules is 10W/133mm for Numinous M, the maximum capacity that the profile in which the modules are placed is 20W/m for Numinous M profile.
- The standard lengths for the Numinous Recessed M fixtures is 2389mm including the endcaps. Each fixture of length 2389mm contains 18 pieces of modules which are placed side by side in the Numinous Recessed M Profile. Kindly note - there is no gap in between the modules.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Recessed M - Circle - #2135



48W





4536lm



4000K





15°



Photometric Data

Light source	LED - High Power	Light output ratio	66%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4536lm	Color rendering index (R9)	> 50
Source lumens	6840lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	94.5lm/W	UGR	< 16
Beam angle	15°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

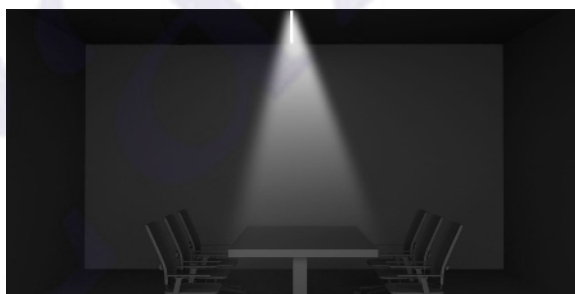

Technical Data

Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



48W





4646lm



4000K





24°



Photometric Data

Light source	LED - High Power	Light output ratio	67%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4646lm	Color rendering index (R9)	> 50
Source lumens	6840lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	96.81lm/W	UGR	< 16
Beam angle	24°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

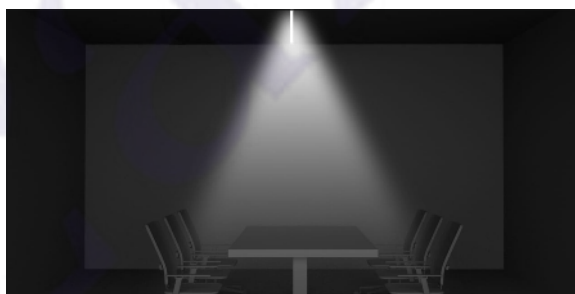

Technical Data

Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Recessed M - Circle - #2135



48W





4713lm



4000K





38°



Photometric Data

Light source	LED - High Power	Light output ratio	68%
Power (W)	48W	Color rendering index (Ra)	> 92
Delivered lumens	4713lm	Color rendering index (R9)	> 50
Source lumens	6840lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	98.2lm/W	UGR	< 16
Beam angle	38°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric

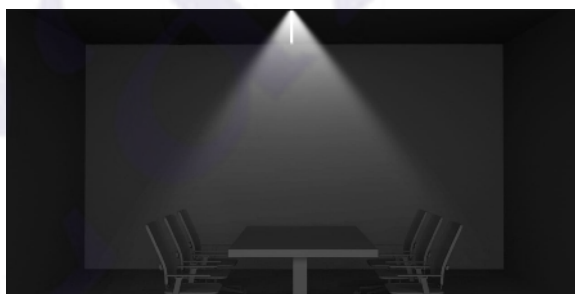


Technical Data


Mounting detail	Recessed	Product weight	1847gms Per 2389MM
Fixing detail	Dual tension spring	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	Aluminum	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	CV - Remote

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Reflector Finish

- ☒ Specular
- ☐ Pearl Black

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Note :-

- Although the maximum capacity of the Modules is 10W/133mm for Numinous M, the maximum capacity that the profile in which the modules are placed is 20W/m for Numinous M profile.
- The standard lengths for the Numinous Recessed M fixtures is 2389mm including the endcaps. Each fixture of length 2389mm contains 18 pieces of modules which are placed side by side in the Numinous Recessed M Profile. Kindly note - there is no gap in between the modules.

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.