

Shuays Mini - #3050



1W




97lm



3000K




60°

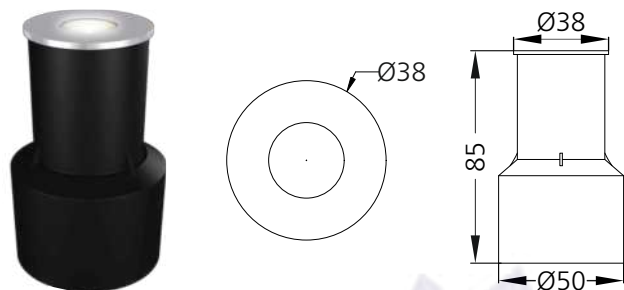

Note :
This Luminaire can not be operated
out of water for over 15 minutes.

Photometric Data

Light source	LED - High Power	Light output ratio	87%
Power (W)	1W	Color rendering index (Ra)	> 92
Delivered lumens	97lm	Color rendering index (R9)	> 50
Source lumens	112lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	97.6lm/W	UGR	< 19
Beam angle	60°	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Symmetric



Technical Data

Mounting detail	Underwater Light	Glow wire test	850°
Fixing detail	Backbox	Product weight	297gms
Orientation	Fixed	Safety class	III
IP rating	IP68	Insulation class	III
IK rating	IK08	Voltage	DC24V
Heatsink material	SS	Driver	Remote - DC24V
Ring material	SS		

True Bin	N of test cases
1	96
2	97
3	94
4	93
5	97
6	97
7	98
8	99
9	97
10	95
11	93
12	93
13	93
14	90
15	92
16	91



A color vector graphic showing a circular shape with a black outline, centered on a background with a color gradient from blue to red. The background is divided into a grid of squares. The text "Color Vector Graphic" is visible in the top right corner.

☐ SS
☒ Custom RAL Color



Constant Voltage Driver
75w DC24V
Dali Dimmable