

Shuays R6 - #3053



12W





622lm



Red





15°



Note :
This Luminaire can not be operated
out of water for over 15 minutes.

Photometric Data

Light source	LED - High Power	Beam angle	15°
Power (W)	12W	Light output ratio	76%
Delivered lumens	622lm	LED life	L90 B10 Tj75°C
Source lumens	816lm	UGR	<19
Colour temperature (K)	Red	Operating temperature	-20°C to +50°C
Luminaire efficacy	51.84lm/W	Light distribution	Direct - Symmetric

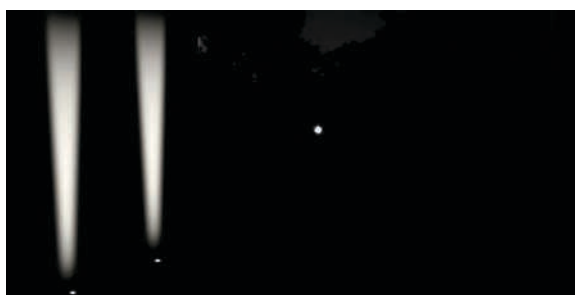

Technical Data

Mounting detail	Underwater Light	Glow wire test	850°
Fixing detail	Backbox	Product weight	1529gms
Orientation	Fixed	Safety class	III
IP rating	IP68	Insulation class	III
IK rating	IK08	Voltage	DC24V
Heatsink material	SS	Driver	Remote - DC24V
Ring material	SS		

Finish Options

Trim Finish

- ☐ SS
- ☒ Custom RAL Color

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver