

## Shuays Surface S3 - #3057



6W




271lm



Blue





15°



Note :  
This Luminaire can not be operated  
out of water for over 15 minutes.

### Photometric Data

|                        |                  |                       |                    |
|------------------------|------------------|-----------------------|--------------------|
| Light source           | LED - High Power | Beam angle            | 15°                |
| Power (W)              | 6W               | Light output ratio    | 79%                |
| Delivered lumens       | 271lm            | LED life              | L90 B10 Tj75°C     |
| Source lumens          | 342lm            | UGR                   | <19                |
| Colour temperature (K) | Blue             | Operating temperature | -20°C to +50°C     |
| Luminaire efficacy     | 45.17lm/W        | Light distribution    | Direct - Symmetric |

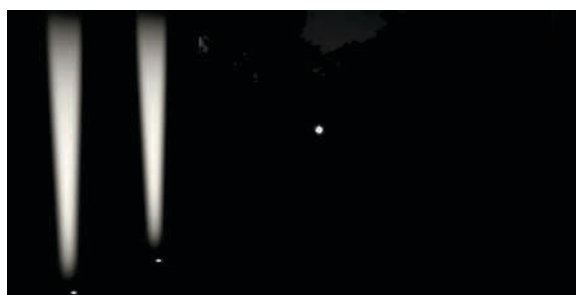

### Technical Data

|                   |                          |                  |                |
|-------------------|--------------------------|------------------|----------------|
| Mounting detail   | Surface Underwater Light | Glow wire test   | 850°           |
| Fixing detail     | Mounting Clamp           | Product weight   | 1324gms        |
| Orientation       | Adjustable               | Safety class     | III            |
| IP rating         | IP68                     | Insulation class | III            |
| IK rating         | IK07                     | Voltage          | DC24V          |
| Heatsink material | SS                       | Driver           | Remote - DC24V |
| Ring material     | SS                       |                  |                |

## Finish Options

### Trim Finish

- ☐ SS
- ☒ Custom RAL Color

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver