

Svelte RGB - #2034



14.4W/M




905lm/m



RGB




120°

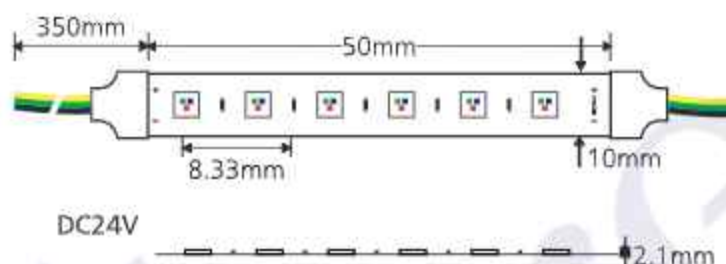
Max Length
5000MM

Min Cut
50MM


Photometric Data


Light source	LED - Low Power	Light output ratio	86%
Power (W)	14.4W/M	Color rendering index (Ra)	NA
Delivered lumens	905lm/m	Color rendering index (R9)	NA
Source lumens	1051lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	RGB	LED life	L90 B10 Tj75°C
Luminaire efficacy	62.84lm/W	Operating temperature	-20°C to +50°C
Beam angle	120°	Light distribution	Direct - Symmetric




Technical Data

Mounting detail	Profile Mounted	Safety class	III
Fixing detail	Adhesive Tape	Insulation class	III
Orientation	Fixed	Driver Input Voltage	AC230V
IP rating	IP65	Strip Light voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


Profile for Svelte RGB



ACLAP02



ACLAP04



ACLAP05

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver