

# Trax Ceiling Indirect TL - #2067



6W/M





442lm/m



2700K




Diffused

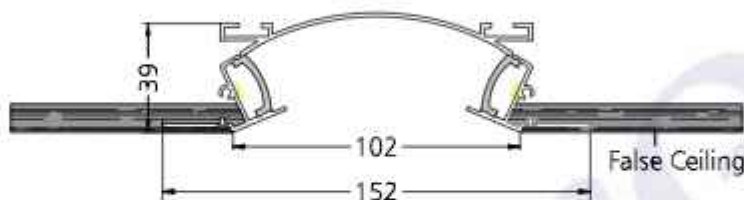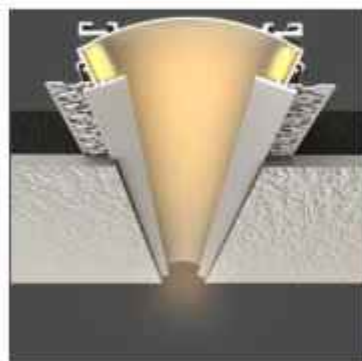

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	442lm/m	Color rendering index (R9)	>50
Source lumens	756lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	73.67lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

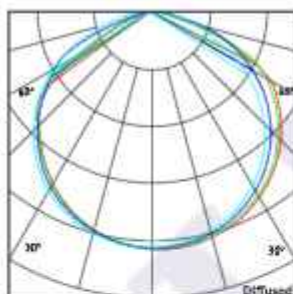


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs

Hue Bin vs Rf Graph

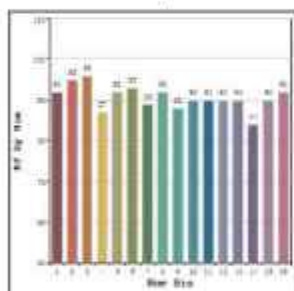

Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.

# Trax Ceiling Indirect TL - #2067



6W/M





452lm/m



3000K




Diffused

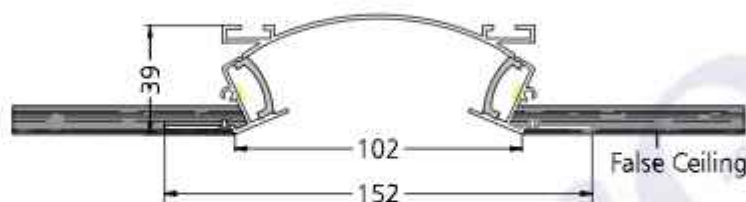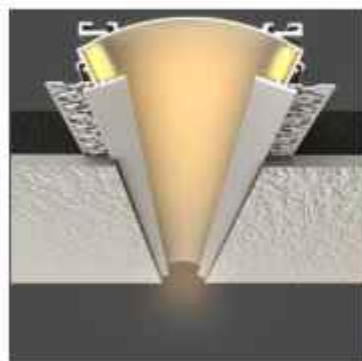

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	57%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	452lm/m	Color rendering index (R9)	>50
Source lumens	786lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	75.37lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

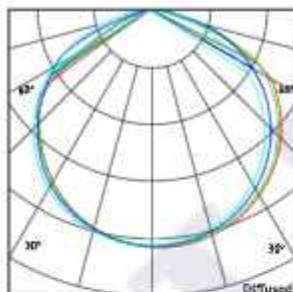


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

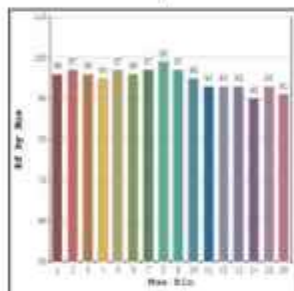


Color Vector Graph



Spectrum vs Wavelength Graph

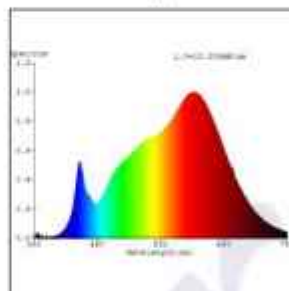

CIE Chromaticity Graph

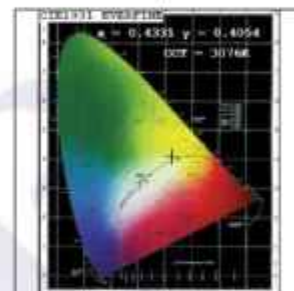

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.



# Trax Ceiling Indirect TL - #2067



6W/M





465lm/m



4000K




Diffused

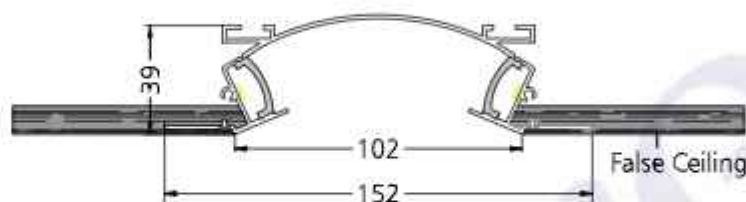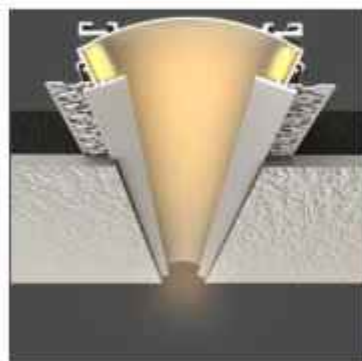

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	55%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	465lm/m	Color rendering index (R9)	>50
Source lumens	834lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	77.63lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

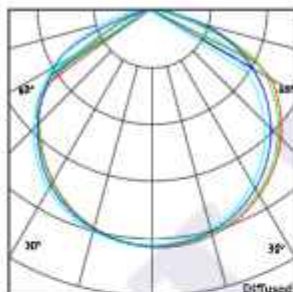


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

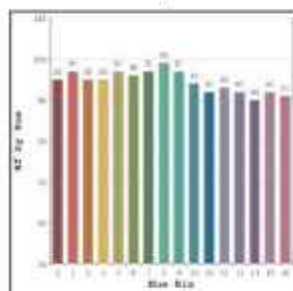


Color Vector Graph



Spectrum vs Wavelength Graph

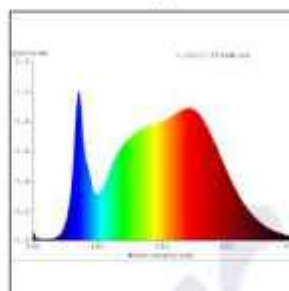

CIE Chromaticity Graph

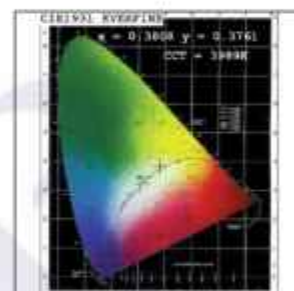

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

# Trax Ceiling Indirect TL - #2067



12W/M





880lm/m



2700K




Diffused

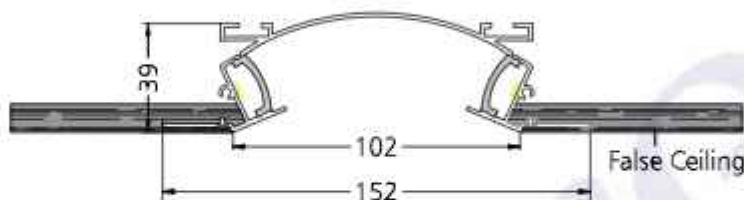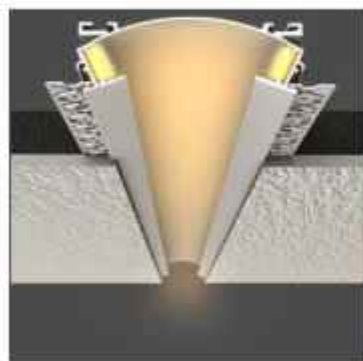

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	880lm/m	Color rendering index (R9)	>50
Source lumens	1512lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	73.38lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

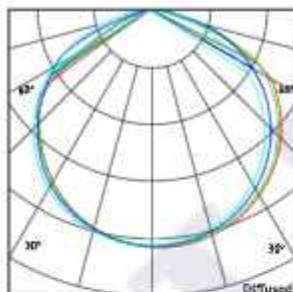

## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph

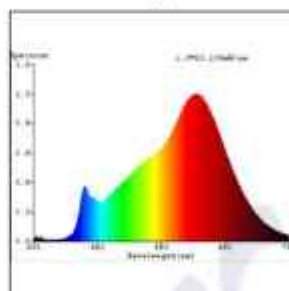

CIE Chromaticity Graph

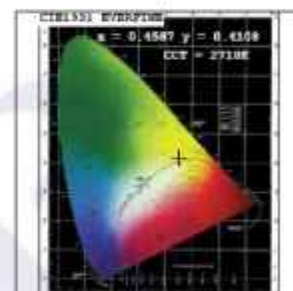

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.



# Trax Ceiling Indirect TL - #2067



12W/M





901lm/m



3000K




Diffused

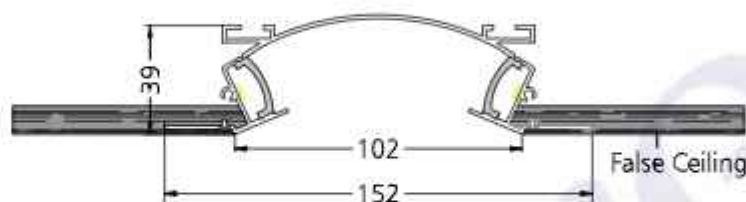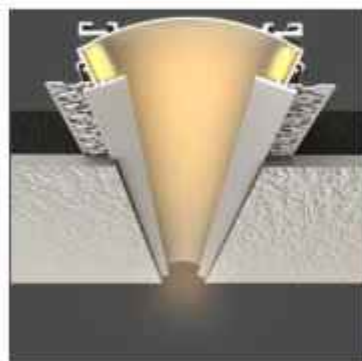

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	57%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	901lm/m	Color rendering index (R9)	>50
Source lumens	1572lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	75.08lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

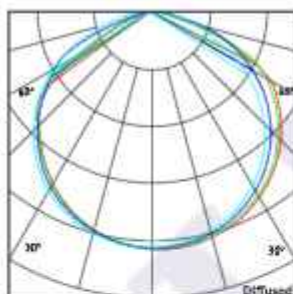


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

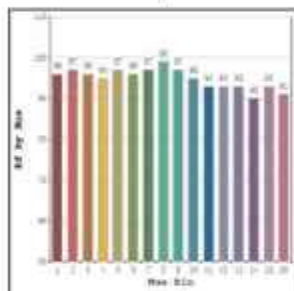


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

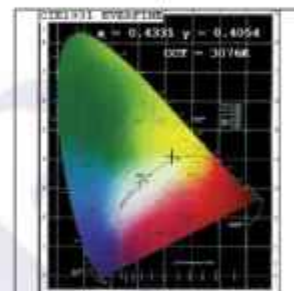

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.

# Trax Ceiling Indirect TL - #2067



12W/M





928lm/m



4000K




Diffused

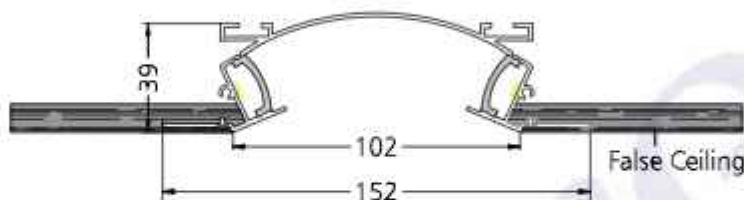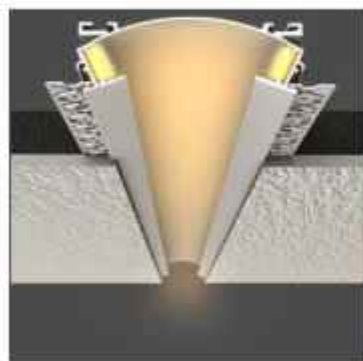

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	55%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	928lm/m	Color rendering index (R9)	>50
Source lumens	1668lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	77.35lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

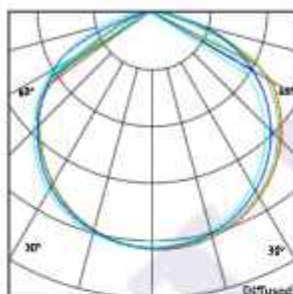


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

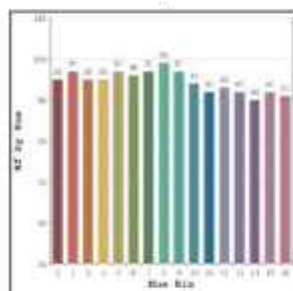


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

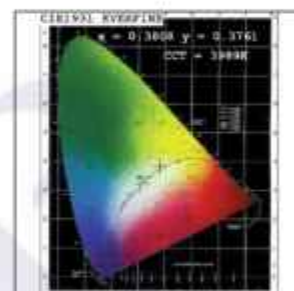

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable



# Trax Ceiling Indirect TL - #2067



24W/M





1764lm/m



2700K




Diffused

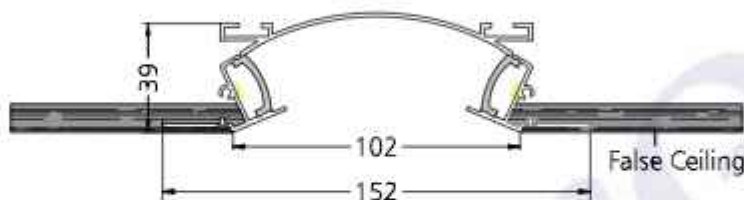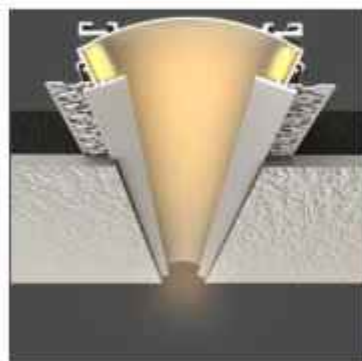

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	1764lm/m	Color rendering index (R9)	>50
Source lumens	3024lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	73.53lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

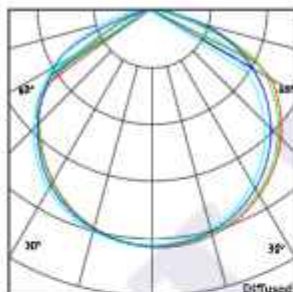


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

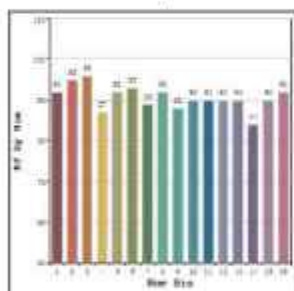

Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.

# Trax Ceiling Indirect TL - #2067



24W/M





1808lm/m



3000K




Diffused

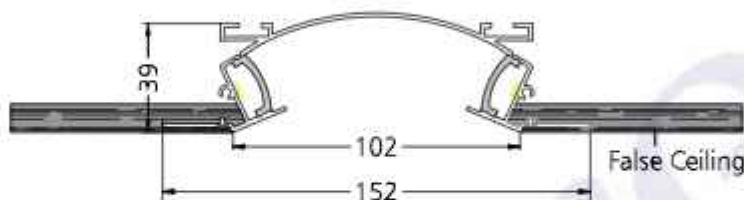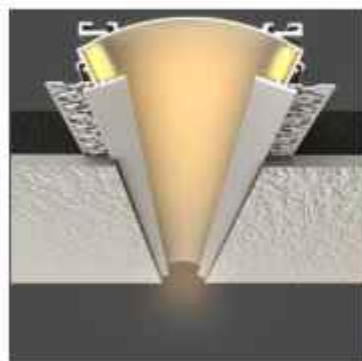

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	57%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	1808lm/m	Color rendering index (R9)	>50
Source lumens	3144lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	75.37lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

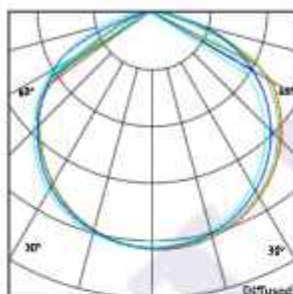


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

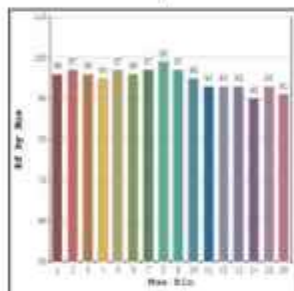


Color Vector Graph



Spectrum vs Wavelength Graph

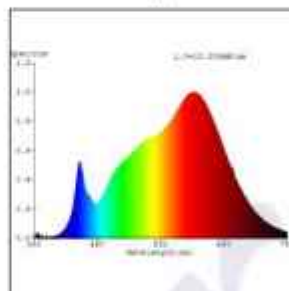

CIE Chromaticity Graph

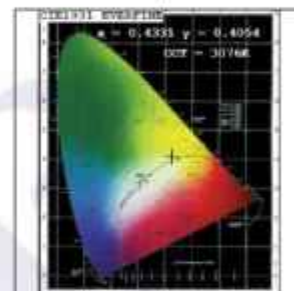

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable



# Trax Ceiling Indirect TL - #2067



24W/M





1863lm/m



4000K




Diffused

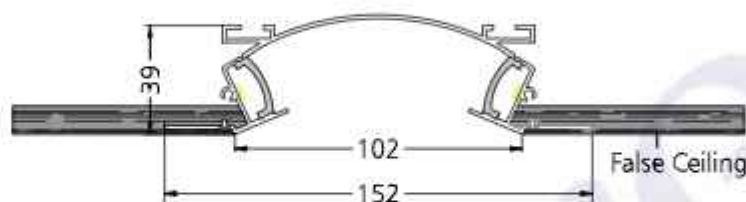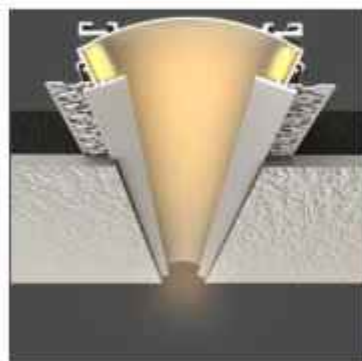

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	55%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	1863lm/m	Color rendering index (R9)	>50
Source lumens	3336lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	77.63lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

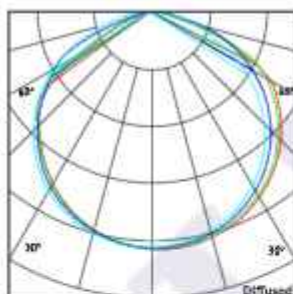


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

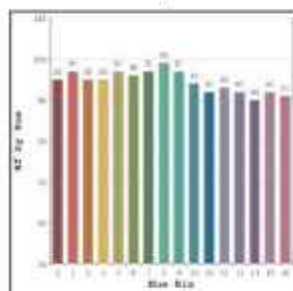


Color Vector Graph



Spectrum vs Wavelength Graph

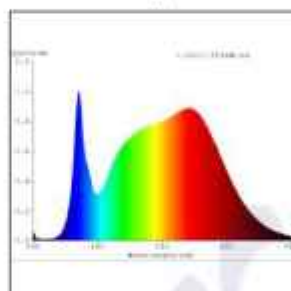

CIE Chromaticity Graph

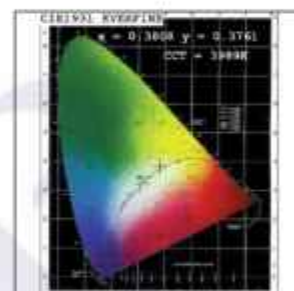

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.

# Trax Ceiling Indirect TL - #2067



20W/M





1475lm/m to  
1553lm/m



2700K to  
6500K




Diffused

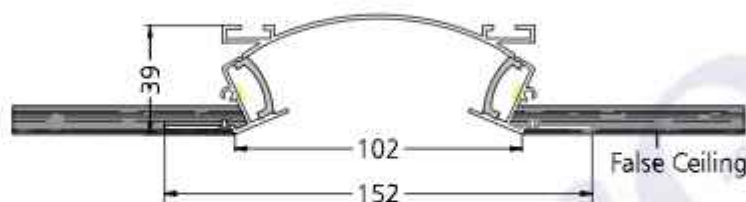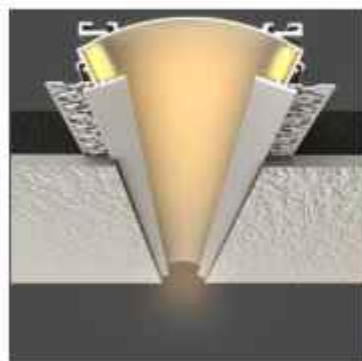

Trimless Mounting

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	20W/M	Color rendering index (Ra)	>92
Delivered lumens	1475lm/m to 1553lm/m	Color rendering index (R9)	>50
Source lumens	2520lm/m to 2640lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K to 6500K	LED life	L90 B10 Tj75°C
Luminaire efficacy	73.78lm/W to 77.69lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

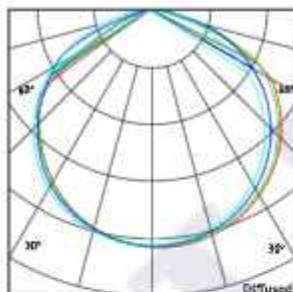


## Technical Data\*

Mounting detail	Ceiling Mounted	Safety class	III
Fixing detail	Mounting with Screw	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

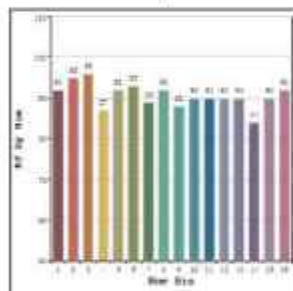





Color Vector Graph



Spectrum vs Wavelength Graph

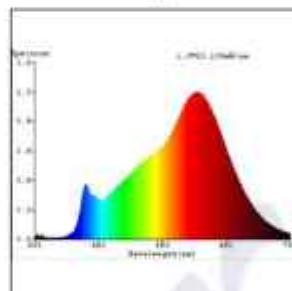

CIE Chromaticity Graph

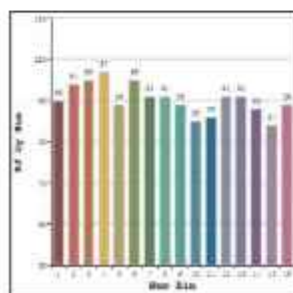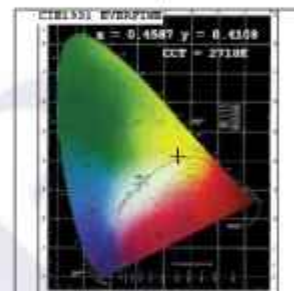

## Finish Options

### Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.