

# Trax Shelf Recessed - #2085



6W/M




419lm/m



2700K




Diffused

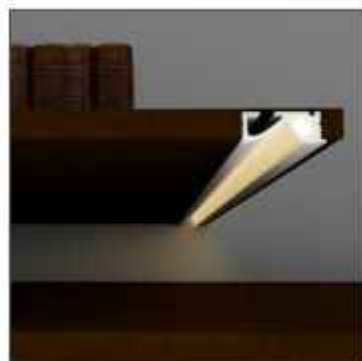

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	419lm/m	Color rendering index (R9)	>50
Source lumens	606lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	69.98lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

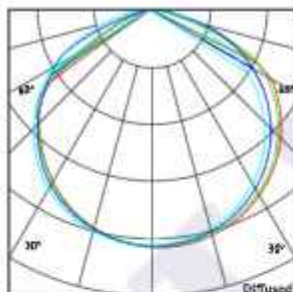

## Technical Data\*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs

Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

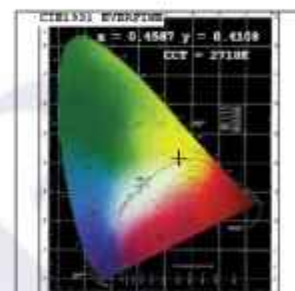

## Finish Options

### Body Finish

- Matt Black
- Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.

# Trax Shelf Recessed - #2085



6W/M




432lm/m



3000K




Diffused

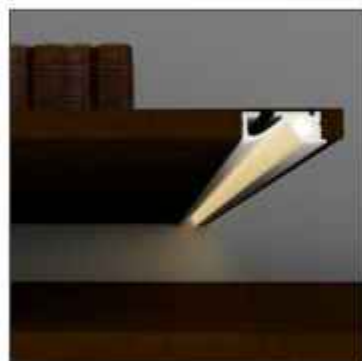

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	432lm/m	Color rendering index (R9)	>50
Source lumens	618lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	72lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

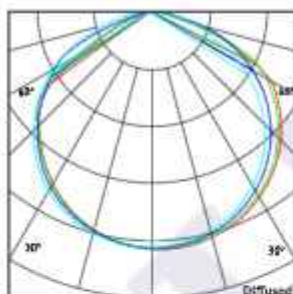


## Technical Data\*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

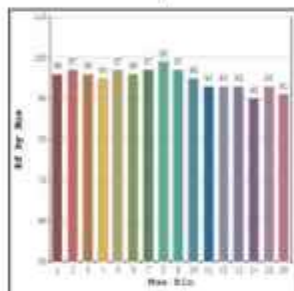


Color Vector Graph



Spectrum vs Wavelength Graph

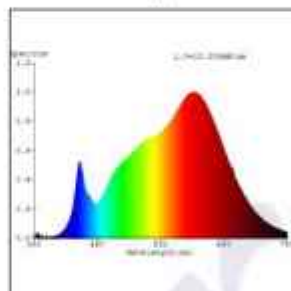

CIE Chromaticity Graph

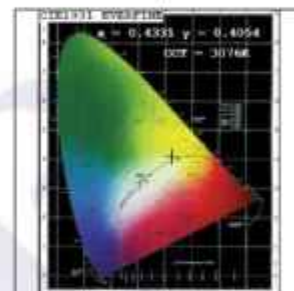

## Finish Options

### Body Finish

- Matt Black
- Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.



# Trax Shelf Recessed - #2085



6W/M




444lm/m



4000K




Diffused

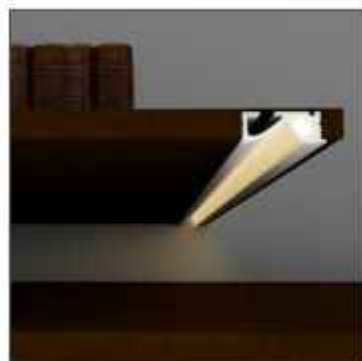

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	70%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	444lm/m	Color rendering index (R9)	>50
Source lumens	630lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	74.02lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

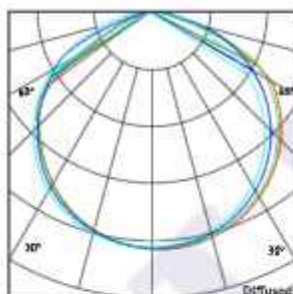


## Technical Data\*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs

Hue Bin vs Rf Graph

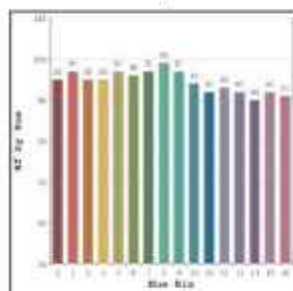


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

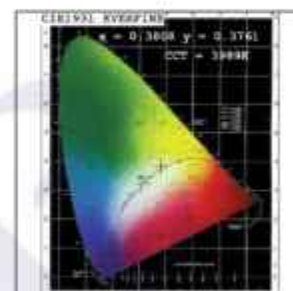

## Finish Options

### Body Finish

- Matt Black
- Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.

# Trax Shelf Recessed - #2085



12W/M




839lm/m



2700K




Diffused

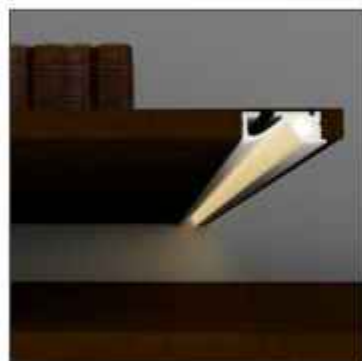

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	839lm/m	Color rendering index (R9)	>50
Source lumens	1212lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	69.98lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

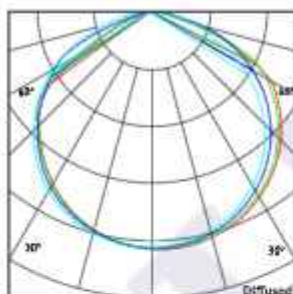

## Technical Data\*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph

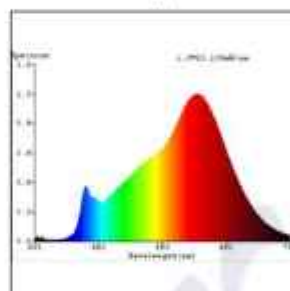

CIE Chromaticity Graph

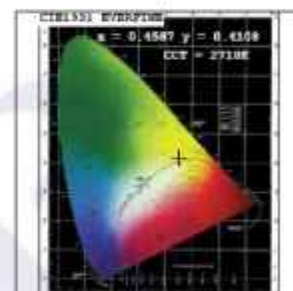

## Finish Options

### Body Finish

- Matt Black
- Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.



# Trax Shelf Recessed - #2085



12W/M




859lm/m



3000K




Diffused

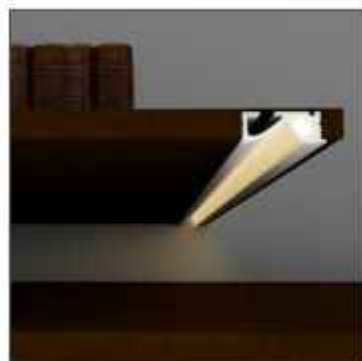

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	859lm/m	Color rendering index (R9)	>50
Source lumens	1236lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	71.66lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

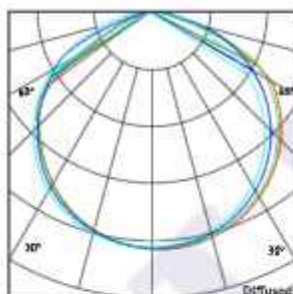


## Technical Data\*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

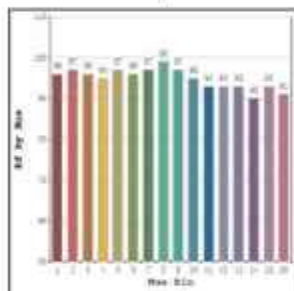


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

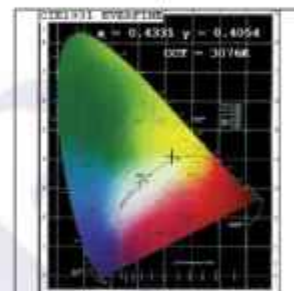

## Finish Options

### Body Finish

- Matt Black
- Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.

# Trax Shelf Recessed - #2085



12W/M




884lm/m



4000K




Diffused

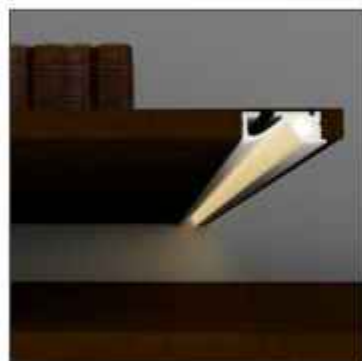

## Photometric Data\*

Light source	LED - Low Power	Light output ratio	70%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	884lm/m	Color rendering index (R9)	>50
Source lumens	1260lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	73.68lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

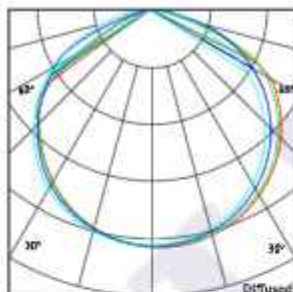


## Technical Data\*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


\*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

## Photometric Graphs


Hue Bin vs Rf Graph

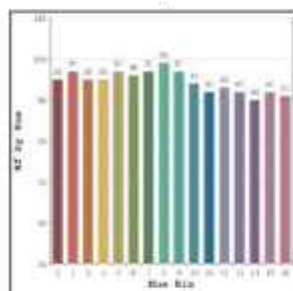


Color Vector Graph



Spectrum vs Wavelength Graph

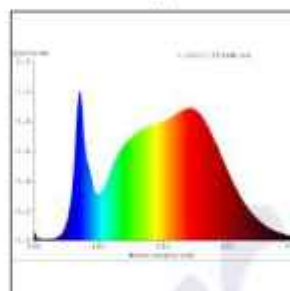

CIE Chromaticity Graph

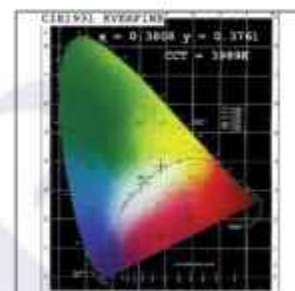

## Finish Options

### Body Finish

- Matt Black
- Custom RAL Color

### Max Length

5000MM

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.